



J2111A Current Injector



Product specifications are subject to change without notice.

The J2111A Current Injector is the most versatile tool in the Picotest Signal Injector product line. Coupled with the G5100A AWG, or other equivalent function generator, it is capable of performing small-signal load steps up to 40MHz, with up to 20ns rise/fall times. Rise and fall times can be controlled and arbitrary waveforms can be used to drive the injector producing load current profiles of virtually any characteristic pattern. This is ideal for emulating all types of load conditions, including high speed digital circuit loading, battery discharge profiles, or spontaneous current spikes.

When coupled with a network analyzer, the Current Injector can be used to measure the output impedance of all types of circuits and systems including power supplies, voltage regulators, power buses, and batteries. It can be used to **non-invasively** measure the stability of a combined input filter /negative resistance of a switching power supply or the phase margin of a linear or switching regulator WITHOUT the need to break the control loop.

It also supports applications in the measurement and extraction of transistor data, including small signal current gain, Ft, and many other dynamic performance parameters. In RF and instrumentation circuits it can be used to provide constant current biasing for class A amplifiers and buffers.

The Ultimate Controllable Current Source

The Current Injector has two connections for the output current flow. The controlling input is an arbitrary user controlled DC+AC signal that can be taken from either a signal generator or network analyzer. A built-in bidirectional

bias current enables Class A operation for use with network analyzers.

The output current is reduced 40dB from the input signal, resulting in 10mA/V scaling. The current monitor output port is designed to be terminated into 50 Ohms and can be used with the network analyzer, an oscilloscope or a DMM to monitor the output current of the injector on a 1A/V scale.

KEY FEATURES:

J2111A Current Injector

- The versatile current source you can't be without; enables high fidelity load step, impedance, and stability measurements
- Enables non-invasive phase margin testing
- High speed load stepping current source – 20nSec edges
- DC-40MHz usable range
- Bi-Lateral operation works with positive or negative source
- Built in current offset for use with a network analyzer
- Precision current monitor with 50 Ohm output
- Works with any manufacturer's oscilloscope or network analyzer
- Current output easily controlled by any AWG or function generator
- Can be used to measure battery impedance
- Includes high PSRR low noise regulator with universal input
- Can be used to measure input filter stability

Accessories to Sharpen Your Analyzer's Focus


J2111A Current Injector



Specifications		
Characteristic	Typical	Units
Output Current Variation (Controllable)	50	mA
Total Output Current Variation (Controllable+Bias)	74	mA
Max input voltage DC+AC	+/-5	A / V
Output voltage	40	V
Current Monitor	1	V / A
Modulator Gain	10m	A / V
Offset Current (typical)	+24m/0/-24m	A
Usable Bandwidth	DC-40M	Hz
Temperature Range	0 - 50	C
Maximum Altitude	6000	Ft

Mechanical characteristics	
Dimensions (box only)	109.22 mm x 89.66 mm x 50.80 mm 4.30" x 3.53" x 2.00"
(box + connectors)	122.68 mm x 89.66 mm x 50.80 mm 4.83" x 3.53" x 2.00"
Weight	0.210 kg / 0.463 lbs

Connectors	
Input	BNC, MOD - BNC
Output	Banana

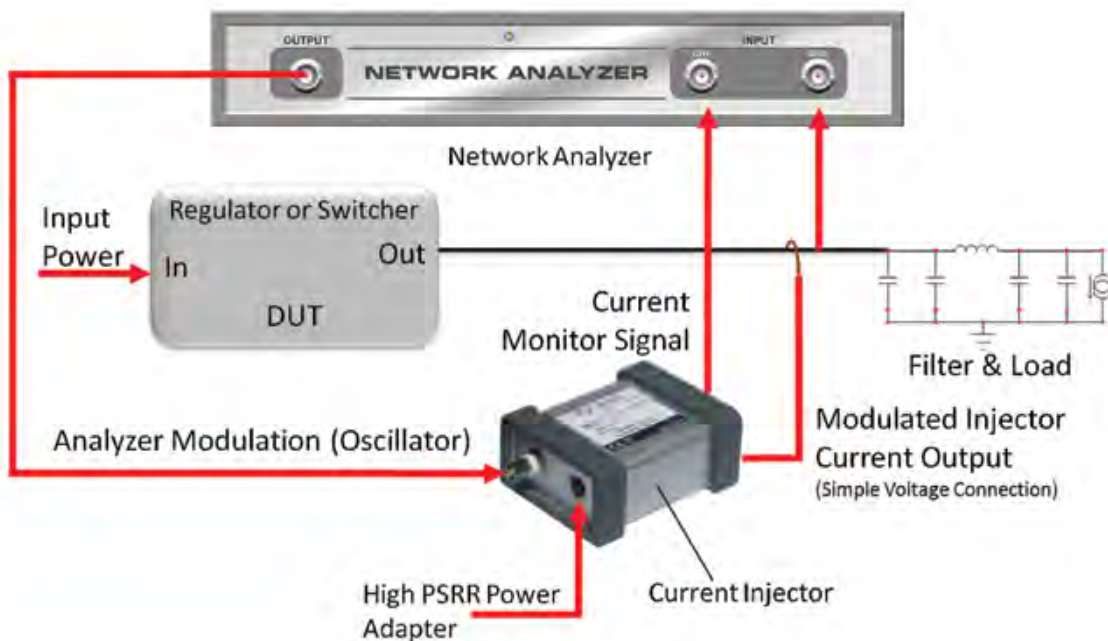

The J2111A Current Injector supports Non-invasive phase margin measurements. You can actually use it to measure the stability of your power supplies WITHOUT having to break the control loop. Simply connect the Current injector output (+ and - leads) to the signal of interest and you can measure the impedance, stability, or step load response.


Product specifications are subject to change without notice.

Copyright © 2011 PICOTEST

Need more information:
1-877-914-PICO (7426)
info@picotest.com
www.picotest.com



J2112A High Current Injector

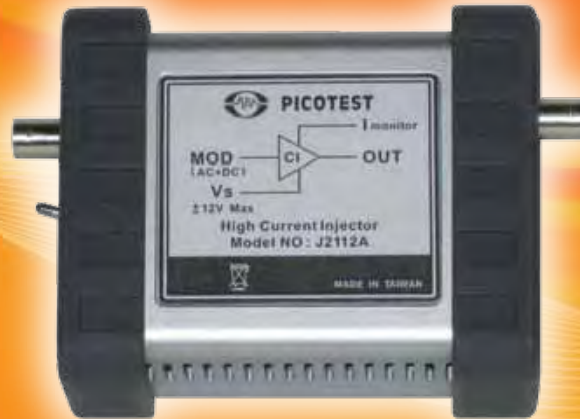

Product specifications are subject to change without notice.

The J2112A Current Injector is an extremely versatile tool addition to the Picotest Signal Injector line-up. Coupled with the G5100A AWG, or other equivalent function generator, it is capable of performing small and large-signal load steps up to 40MHz, with up to 20ns rise/fall times, and with currents up to 1amp. Rise and fall times can be controlled and arbitrary waveforms can be used to drive the injector producing load current profiles of virtually any characteristic pattern. This is ideal for emulating all types of load conditions, including high speed digital circuit loading, battery discharge profiles, or spontaneous current spikes.

When coupled with a network analyzer, the J2112A Current Injector can be used to measure the output impedance of all types of circuits and systems including power supplies, voltage regulators, power buses, and batteries. It can be used to NON-INVASIVELY measure the stability of a combined input filter /negative resistance of a switching power supply or the phase margin of a linear or switching regulator WITHOUT the need to break the control loop.

The J2112A also supports applications in the measurement and extraction of transistor data, including current gain, Ft and many other dynamic performance parameters. In RF and instrumentation circuits it can be used to provide constant current biasing for class A amplifiers and buffers.

The Ultimate Controllable Current Source

The controlling input accepts an arbitrary user controlled DC+AC signal that can be taken from any DC source, signal

generator or network analyzer. A built-in selectable bias current enables Class A operation for use with network analyzers.

The output current is reduced 40dB from the input signal, resulting in 10mA/V scaling. The current monitor output port is designed to be terminated into 50 Ohms and can be used with the network analyzer, an oscilloscope or a DMM to monitor the output current of the injector on a 1A/V scale.

KEY FEATURES:

J2112A Current Injector

- Fast Transient Load Stepping up to 1Amp
- 20nSec typ rise and fall time
- DC-40MHz usable range (interconnection dependent)
- Measures non-invasive phase margin, output impedance, reverse transfer, crosstalk, input filter stability
- Works with positive voltage sources
- Built in offset for use with Network Analyzer
- Precision current monitor with 50 Ohm output
- Works with any manufacturer's AWG, Function Generator or Network Analyzer
- Includes High PSRR Low Noise Regulator with Universal input

Accessories to Sharpen Your Analyzer's Focus


J2112A Current Injector



Specifications		
Characteristic	Typical	Units
Max Input Voltage DC+AC	+5	V
Max Output Current	+1	A
Min Output Current	24	mA
Max Output Voltage	10.5	Vcc
Current Monitor	0.1	V/A
Modulator Gain	0.2	A/V
Offset Current (typical)	+240	mA
-3dB Bandwidth (-10dBm)	DC-50	MHz
Temperature Range	0 - 50	C
Maximum Altitude	6000	Ft

Mechanical characteristics	
Dimensions (box only)	109.22 mm x 89.66 mm x 50.80 mm 4.30" x 3.53" x 2.00"
(box + connectors)	122.68 mm x 89.66 mm x 50.80 mm 4.83" x 3.53" x 2.00"
Weight	0.210 kg / 0.463 lbs

Connectors	
Input	BNC
Output	Banana

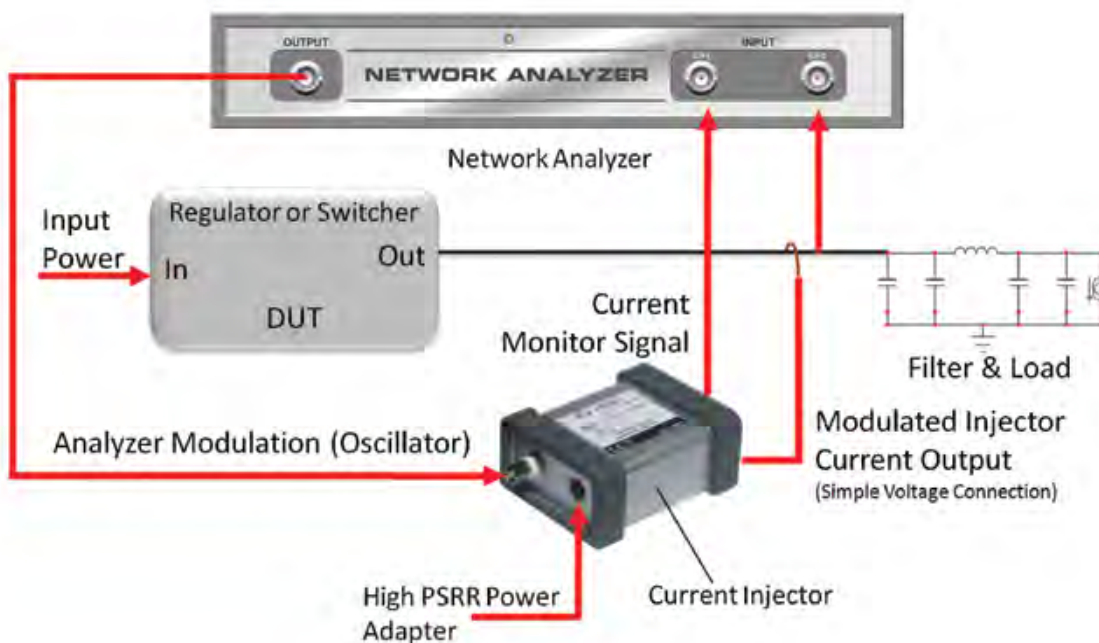

The J2112A Current Injector supports non-invasive phase margin measurements. You can actually use it to measure the stability of your power supplies WITHOUT having to break the control loop. Simply connect the Current Injector output (+ and - leads) to the signal of interest and you can measure the impedance, stability, or step load response.

Product specifications are subject to change without notice.

Copyright © 2012 PICOTEST

Need more information:
1-877-914-PICO (7426)
info@picotest.com
www.picotest.com