


R&S®RTB2000


versus

Keysight DSO/MSOX2000A

The R&S®RTB2000 outperforms the Keysight InfiniiVision 2000 X-series in major parameters with the power of 10.

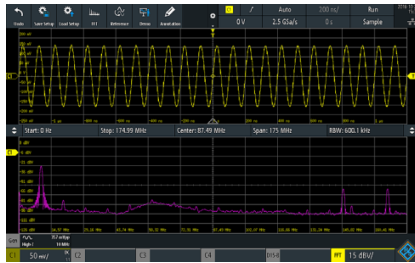

R&S®RTB2000: 10.1" display, 1280 × 800 pixel resolution.

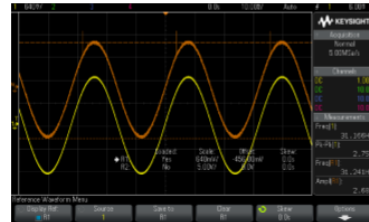

Keysight DSO/MSOX2000A: 8.5" display, 800 × 480 pixel resolution

Your benefit	Features
10-bit ADC: four times more vertical resolution	The proprietary Rohde & Schwarz 10-bit ADC used in the R&S®RTB2000 allow four times more vertical resolution compared to standard 8-bit ADC in the Keysight DSO/MSOX2000A. Finer voltage measurements become important as the voltage levels decrease.
10 Msample memory: capture longer periods	The responsive 10Msample memory per channel with quick zoom functions allow 100 times more acquisition time than the Keysight DSO/MSOX2000A at the same sample rate.
10.1" high-resolution capacitive touchscreen with gesture support	The capacitive touchscreen of the R&S®RTB2000 offers about 3 times more resolution than the display of the Keysight InfiniiVision 2000X Series. Gesture support enables fastest setting times and short learning time.

► For more information, see www.rohde-schwarz.com/product/RTB2000



Parameter	R&S®RTB2000	InfiniiVision 2000X
Channels	4/2 for all models	4/2 for all models
Bandwidth	70/100/200/300 MHz upgradeable	70/100/200 MHz
Min. V/div @ 1 MΩ	1 mV	4 mV
Max. sampling rate	2.5 Gsample/s	2 Gsample/s
ADC resolution	10-bit	8-bit
Memory depth	20 Msample	0.1 Msample, 1 Msample optional
Waveform update rate	50,000 waveforms/s	50,000 waveforms/s
MSO	R&S®RTB-B1 option, 1 Gsample/s, 16 digital channels, 10 Msample, upgradeable	DSOX2MSO option 1 Gsample/s, 8 digital channels, 12.5 ksampl, 125 ksampl optional
Display	10.1", 1280 × 800 pixel	8.5", 800 × 480 pixel
Touchscreen operation	capacitive with gesture support	-
Boot time	10 s	50 s
Multifunction	DVM, counter	DVM, counter
LAN interface	standard 10/100/1000BASE-T	option
Warranty	3 years	5 years
Size, W × H × D	390 × 220 × 152 mm	381 × 204 × 142 mm
Weight	2.5 kg	3.9 kg
Generator option	function and arbitrary, 4-bit pattern	function only
History mode option	up to 160 Msample in 16 to 13000 segments	-
Serial decode options	I ² C, SPI, UART/RS-232/422/485, CAN, LIN	I ² C, SPI, UART/RS-232/422/485, CAN, LIN (on analog channel only)

Innovative user interface, quick and easy to use

The R&S®RTB2000 user interface offers features not available on the Keysight InfiniiVision 2000 X-series.

- Touchscreen with gesture support and on-screen annotation
- Mouse support
- Grid annotations for easy determination of vertical and horizontal values
- Pull up/down menu for optimized waveform viewing
- Quick measure button to immediately display nine automated measurements on the signal



Configurable toolbar (including undo and redo) for fast access to functions and quick finger annotation, allowing fast operation and documentation.

Education mode


The R&S®RTB2000 gives accurate and fast results. With its modern multifunction capabilities, including a built-in generator, it is the perfect tool for education. For classroom training, the education mode deactivates comfort functions such as autoset, quick measure and automatic measurements.

More investment protection

When it comes to investment protection, the R&S®RTB2000 is again class leading. Buy only what you need today and upgrade later as your needs grow. After-purchase upgrades are available for:

- Bandwidth up to 300 MHz
- Digital channels (mixed signal option)
- Serial triggering and decoding of I²C, SPI, UART/RS-232/422/485, CAN/LIN
- History mode with up to 160 Msample memory
- Function, arbitrary and pattern generator

Advantage factors of R&S®RTB2000 versus Keysight InfiniiVision 2000 X-series



4x
More ADC resolution




20x
More memory



1.49x
More display area



1.3x
More sample rate



4x
Lower sensitivity



5x
Faster boot-up

Rohde & Schwarz GmbH & Co. KG

Europe, Africa, Middle East | +49 89 4129 12345
 North America | 1 888 TEST RSA (1 888 837 87 72)
 Latin America | +1 410 910 79 88
 Asia Pacific | +65 65 13 04 88
 China | +86 800 810 82 28 | +86 400 650 58 96
 www.rohde-schwarz.com
 customersupport@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
 PD 5214.9938.32 | Version 01.00 | March 2017 (ad)

Trade names are trademarks of the owners
 R&S®RTB2000 versus Keysight DSO/MOXA2000A
 Data without tolerance limits is not binding | Subject to change
 © 2017 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany