

The effective way to measure key mixer performance parameters

Characterizing RF mixers that have an internal LO using the value-of-three R&S®FPC1500 spectrum analyzer.



Your task

Mixers are frequency-converting components – the input signal has a different frequency than the output signal. A mixer has three connectors: RF (radio frequency), LO (local oscillator) and IF (intermediate frequency). Therefore, mixer characterization typically requires a four-port vector network analyzer. The key test parameters are conversion loss, isolation and reflection. Other parameters include harmonics, 1 dB compression point and intercept points. The relative importance of these individual characteristics varies based on the mixer application.

In the case of a downconversion mixer for a receiver system that operates at lower power level, harmonics and compression point measurements become less significant. In a manufacturing environment, the emphasis is on the cost of testing, so only key parameters are checked during a functionality test.

Rohde & Schwarz solution


Some mixers do not require an external LO since they have an internal embedded LO. Such mixers would only have two connectors: RF and IF. These types of RF mixers with embedded LOs are commonly used in the satellite and military industries. Test setups for two-port mixers are simpler (Fig. 1). The R&S®FPC1500 can be used to measure the key performance test parameters: conversion loss, isolation and reflection (return loss).

Application

Conversion loss

Conversion loss is a measure of the efficiency of the mixer in converting the frequency from RF to IF. It measures the difference in power between the input RF power level and the output IF power level.

Fig. 1: Test setup with the R&S®FPC1500

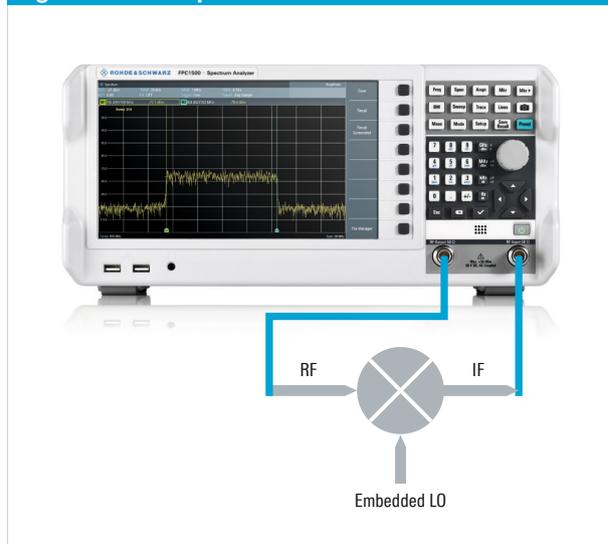

$$\text{Conversion loss} = -10 \log \left| \frac{P_{\text{outIF}}(f_{\text{IF}})}{P_{\text{inRF}}(f_{\text{IF}})} \right| \text{dB}$$

A spectrum analyzer with tracking generator functionality makes scalar transmission measurement possible. The R&S®FPC1500 tracking generator features a frequency conversion option, making it ideal for measurements on mixers. Fig. 2 explains how the measurements are done, while the left screenshot in Fig. 4 illustrates the measurement result from a mixer with a 636.5 MHz internal LO.

Isolation




Isolation is a measure of signal coupling between the ports of a mixer. RF-IF isolation is the attenuation value between RF and IF. This value shows how much RF input signal is attenuated towards IF. The measurement can be easily

accomplished by measuring the IF port with the analyzer set to the RF frequency.

Reflection

Reflection measurements show how good the impedance matching is at an individual port. Traditionally, a vector network analyzer is required for S-parameter measurements like the S_{11} RF input reflection.

Thanks to the unique design of the R&S®FPC1500 that utilizes an internal VSWR bridge, the spectrum analyzer can perform one-port vector reflection measurements. The middle screenshot in Fig. 4 shows a mixer S_{11} return loss in dB, the right screenshot in Fig. 4 shows the mixer input impedance in a Smith chart.

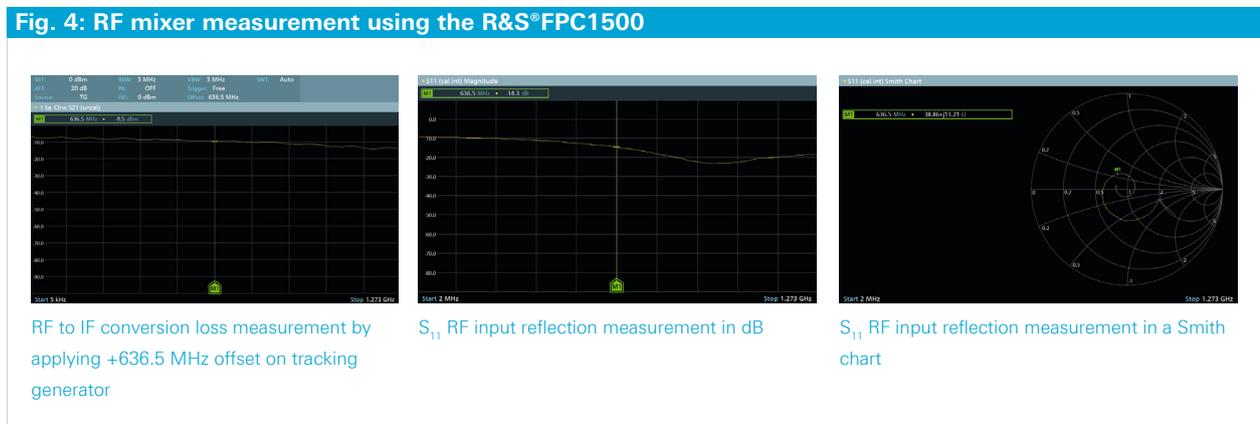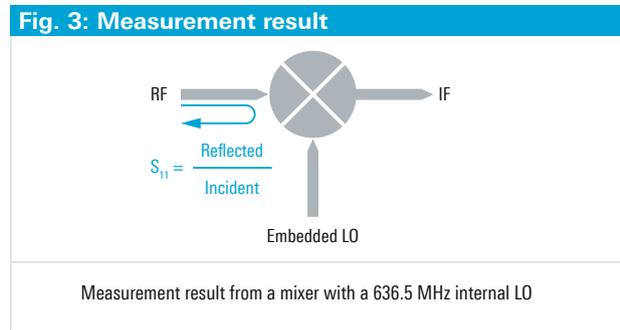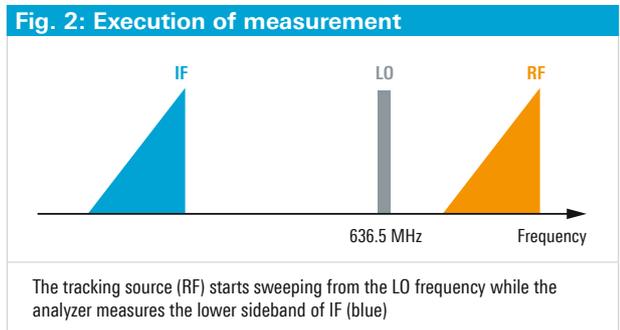

Designation	Type	Order No.
Spectrum analyzer with tracking generator, 5 kHz to 1 GHz	R&S®FPC1500	1328.6660.03
Spectrum analyzer frequency upgrade, 1 GHz to 2 GHz	R&S®FPC-B2	1328.6677.02
Spectrum analyzer preamplifier	R&S®FPC-B22	1328.6690.02
Vector network analysis (R&S®FPC1500 only)	R&S®FPC-K42	1328.7396.02
Calibration unit, one port, 2 MHz to 4 GHz	R&S®ZN-Z103	1321.1828.02

Rohde & Schwarz GmbH & Co. KG
 Europe, Africa, Middle East | +49 89 4129 12345
 North America | 1 888 TEST RSA (1 888 837 87 72)
 Latin America | +1 410 910 79 88
 Asia Pacific | +65 65 13 04 88
 China | +86 800 810 82 28 | +86 400 650 58 96
 www.rohde-schwarz.com
 customersupport@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
 Trade names are trademarks of the owners
 PD 5216.0796.92 | Version 01.00 | October 2018 (ch)
 The effective way to measure key mixer performance parameters
 Data without tolerance limits is not binding | Subject to change
 © 2018 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



ALLICE

Messtechnik GmbH

make ALLICE your partner

ALLICE MESSTECHNIK GMBH

KELSTERBACHER STRASSE 15-19 60528 FRANKFURT AM MAIN

TEL.: +49(0)69-67724-583 FAX: +49(0)69-67724-582

INFO@ALLICE.DE

www.allice.de

© 2018 ALLICE MESSTECHNIK GMBH - ALLE RECHTE VORBEHALTEN.

© 2018 ALLICE MESSTECHNIK GMBH - ALL RIGHTS RESERVED

VERWENDETE WARENZEICHEN UND SCHUTZRECHTE SIND EIGENTUM DER JEWEILIGEN HERSTELLER.
LOGOS AND COMPANY NAMES LISTED ARE TRADEMARKS OR TRADE NAMES OF THEIR RESPECTIVE OWNERS.