


R & S<sup>®</sup> ESSENTIALS

# R&S<sup>®</sup> RTC1000 OSCILLOSCOPE

Great value

- ▶ 50 MHz to 300 MHz
- ▶ Two channels

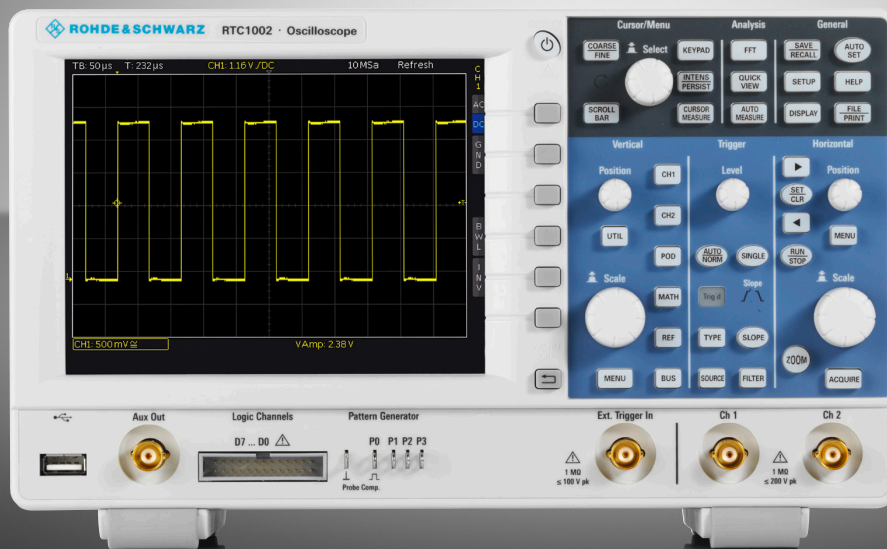

Product Brochure  
Version 07.00

**ROHDE & SCHWARZ**

Make ideas real

**3** year  
warranty




# AT A GLANCE

High sensitivity, multifunctionality and a great price – that is what makes the R&S®RTC1000 oscilloscope so special.

From embedded developers to service technicians to educators – the wide range of functions address a broad group of users. State-of-the-art, high-performance technology in an extremely silent design meets the high requirements of today's customers. These oscilloscopes include a wide range of upgrade options, providing true investment protection for the future.

The R&S®RTC1000 is an X-in-one instrument that offers the functionality of an oscilloscope, logic analyzer, protocol analyzer, frequency analyzer, pattern generator, function generator, digital voltmeter and component tester in a single instrument.

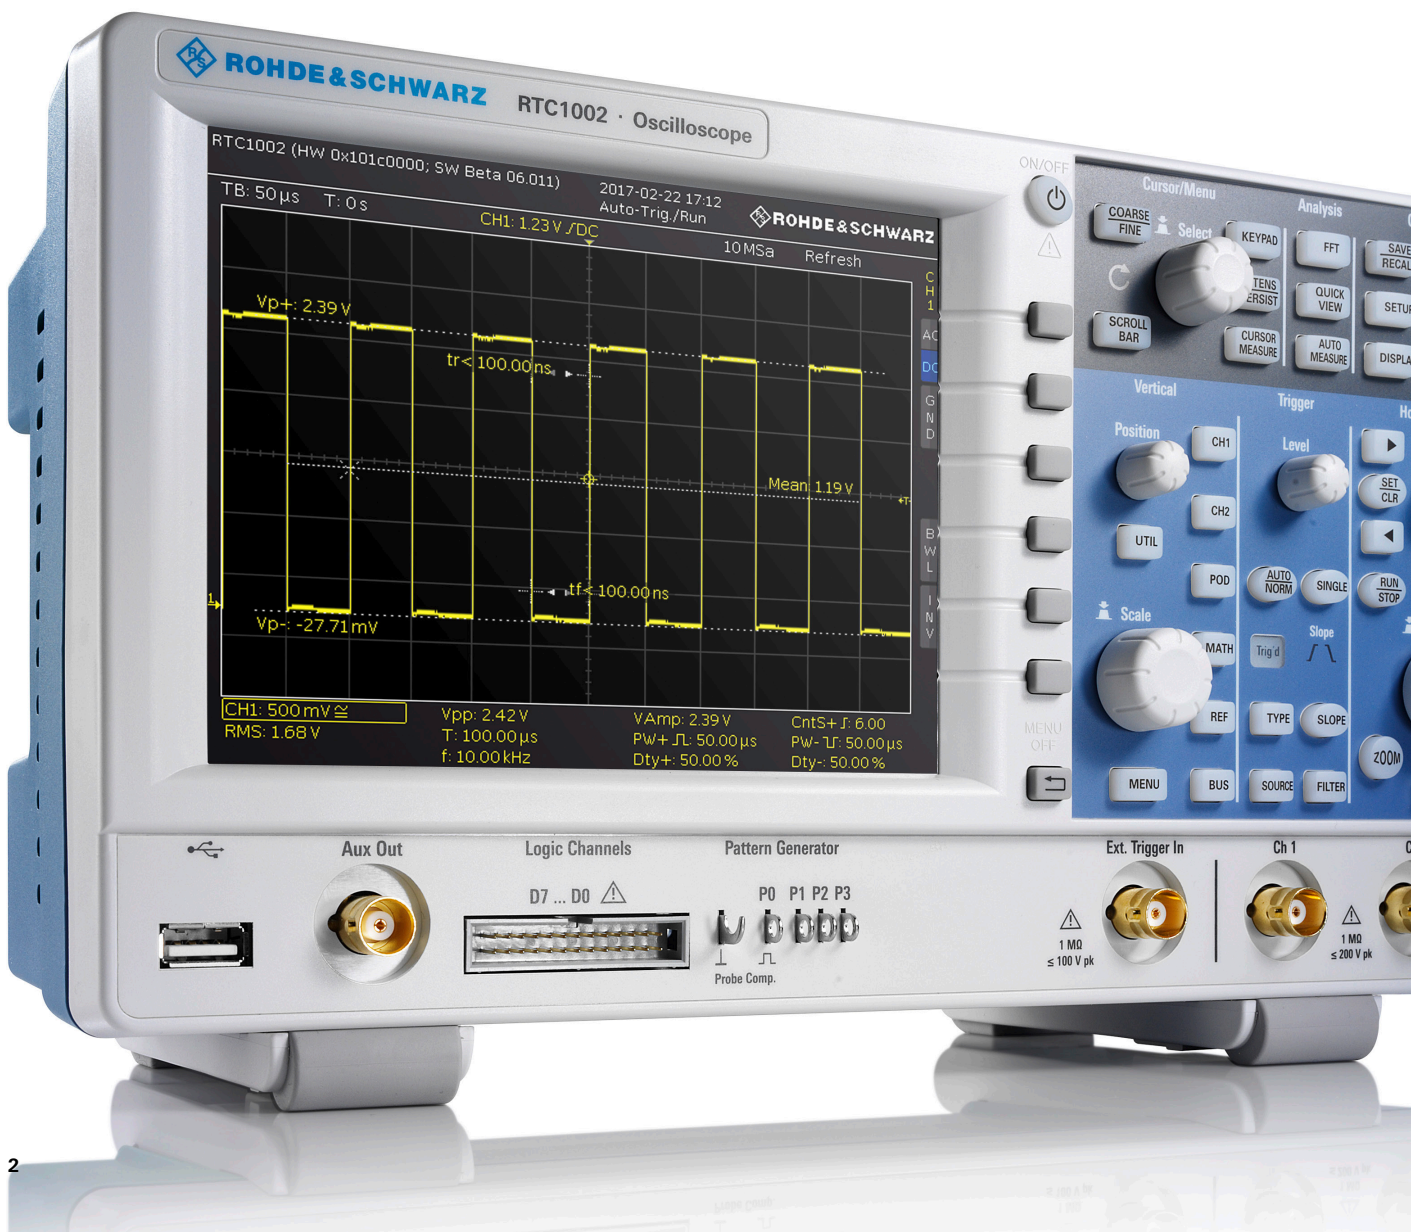

# BENEFITS AND KEY FEATURES

## Top-class hardware-based acquisition for precise measurement results

- ▶ Up to 2 Gsample sampling rate
- ▶ 2 Msample memory depth
- ▶ Low-noise measurement due to state-of-the-art A/D converters

## Versatile measurement functions and fast results

- ▶ Wide selection of automatic measurement functions
- ▶ QuickView: key results at the press of a button
- ▶ Mask test: easy creation of a new mask with just a few keystrokes
- ▶ FFT: the easy way to analyze the signal spectrum

## X-in-1 oscilloscope

- ▶ Oscilloscope
- ▶ Logic analyzer
- ▶ Protocol analyzer
- ▶ Waveform and pattern generator
- ▶ Digital voltmeter
- ▶ Component tester
- ▶ Frequency analysis mode
- ▶ Mask test mode
- ▶ [page 6](#)

## Future-ready investment and scalability

- ▶ Free firmware updates
- ▶ Bandwidth upgrades as required
- ▶ Serial bus analysis options via software licenses



Choose your Rohde & Schwarz oscilloscope

	R&S®RTC1000	R&S®RTB2000	R&S®RTM3000	R&S®RTA4000
<b>Number of oscilloscope channels</b>	2	2/4	2/4	4
<b>Bandwidth in MHz</b>	50, 70, 100, 200, 300	70, 100, 200, 300	100, 200, 350, 500, 1000	200, 350, 500, 1000
<b>Maximum sampling rate in Gsample/s</b>	1/channel, 2 interleaved	1.25/channel, 2.5 interleaved	2.5/channel, 5 interleaved	2.5/channel, 5 interleaved
<b>Maximum memory depth in Msample</b>	1/channel, 2 interleaved	10/channel, 20 interleaved; 160 Msample (optional), segmented memory	40/channel, 80 interleaved; 400 Msample (optional), segmented memory	100/channel, 200 interleaved; 1 Gsample (standard), segmented memory
<b>Timebase accuracy in ppm</b>	50	2.5	2.5	0.5
<b>Vertical bits (ADC)</b>	8	10	10	10
<b>Minimum input sensitivity</b>	1 mV/div	1 mV/div	500 µV/div	500 µV/div
<b>Display</b>	6.5", 640 × 480 pixel	10" capacitive touch, 1280 × 800 pixel	10" capacitive touch, 1280 × 800 pixel	10" capacitive touch, 1280 × 800 pixel
<b>Update rate</b>	10 000 waveforms/s	300 000 waveforms/s in fast segmented memory mode	2 000 000 waveforms/s in fast segmented memory mode	2 000 000 waveforms/s in fast segmented memory mode
<b>MSO</b>	8 channels, 1 Gsample/s	16 channels, 2.5 Gsample/s	16 channels, 5 Gsample/s	16 channels, 5 Gsample/s
<b>Protocol (optional)</b>	I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN	I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN	I <sup>2</sup> C, SPI, UART/RS-232/RS-485, CAN, LIN, audio (I <sup>2</sup> S/LJ/RJ/TDM), ARINC, MIL	I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, audio (I <sup>2</sup> S), ARINC, MIL
<b>Generator(s)</b>	1 generator, 4-bit pattern generator	1 ARB, 4-bit pattern generator	1 ARB, 4-bit pattern generator	1 ARB, 4-bit pattern generator
<b>Math</b>	+, -, *, /, FFT (128k points)	+, -, *, /, FFT (128k points), 21 advanced functions	+, -, *, /, FFT (128k points), 21 advanced functions	+, -, *, /, FFT (128k points), 21 advanced functions
<b>Rohde &amp; Schwarz probe interface</b>	–	–	standard	standard
<b>RF capability</b>	FFT	FFT	spectrum analysis <sup>1)</sup>	spectrum analysis <sup>1)</sup>

<sup>1)</sup> The R&S®RTM-K18 option is not distributed in North America.

# EXCELLENT FEATURES

## Two displays instead of one

- ▶ 20 vertical divisions with virtual screen for straight-forward display of up to 13 signals
- ▶ Minimizable soft menus to enlarge horizontal waveform viewing area


## Integrated logic analyzer (MSO)

- ▶ 8 additional digital channels
- ▶ Synchronous, time-correlated analysis of analog and digital components in embedded designs
- ▶ Fully retrofittable

## Standard LAN and USB interface

- ▶ Seamless integration via MTP
- ▶ Remote display over LAN

## Standard component tester

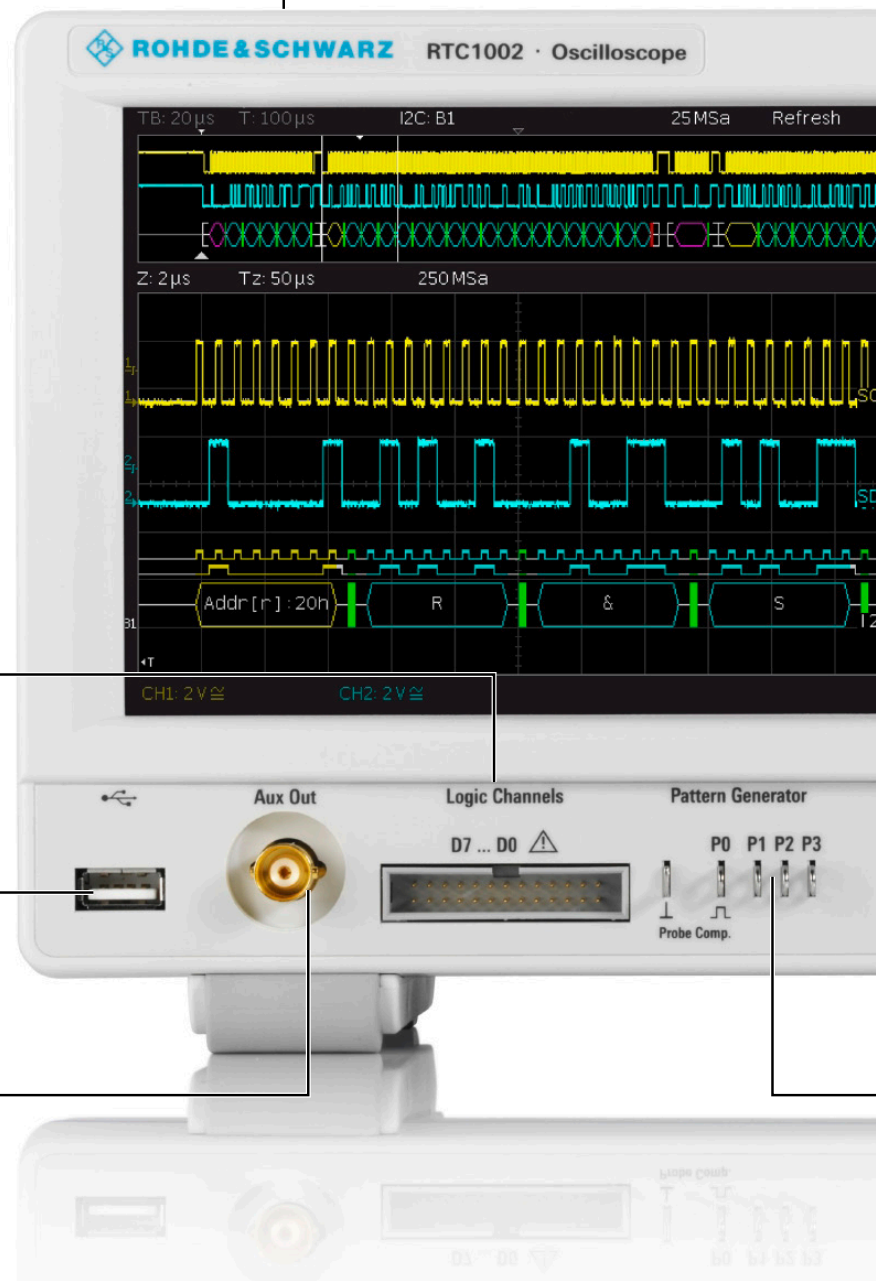

7 second boot time

FFT frequency analysis

- ▶ Standard, 128k points

QuickView: results at the push of a button

- ▶ Graphical display of key measurement results for the active signal

Autoset function

- ▶ Automatic selection of vertical, horizontal and trigger settings for optimal viewing of active signals


Documentation of results at the push of a button

Integrated waveform and pattern generator up to 50 Mbit/s

- ▶ Output of sine, square/pulse, ramp and noise waveforms
- ▶ Output of 4-bit signal patterns




# X-IN-1 OSCILLOSCOPE

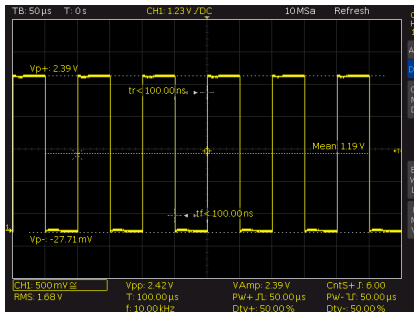


## Oscilloscope

With a sampling rate of up to 2 Gsample/s and a memory depth of up to 2 Msample, the R&S®RTC1000 oscilloscope excels in its class. A waveform update rate of more than 10000 waveforms/s ensures a responsive instrument that reliably catches signal faults. Included tools provide quick results, e.g. QuickView, mask tests, FFT, math, cursors and automatic measurements (including statistics).

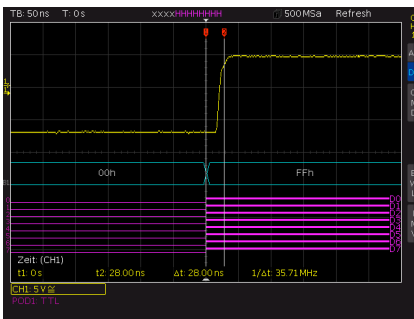


## Logic analyzer

The R&S®RTC-B1 option turns every R&S®RTC1000 into an intuitive-to-use MSO with eight additional digital channels. The oscilloscope captures and analyzes signals from analog and digital components in an embedded design – synchronously and time-correlated to each other. For example, the delay between the input and output of an A/D converter can be conveniently determined using the cursor measurements.

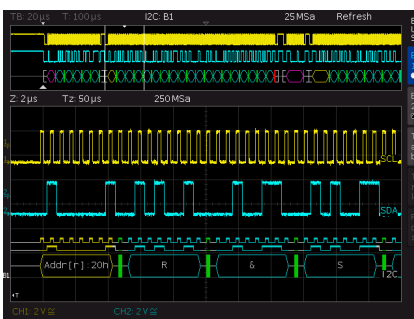


## Protocol analyzer

Protocols such as I<sup>2</sup>C, SPI and CAN/LIN frequently transfer control messages between integrated circuits. The R&S®RTC1000 has versatile options for protocol-specific triggering and decoding of serial interfaces. Selective acquisition and analysis of relevant events and data is possible. With the hardware-based implementation, smooth operation and a high update rate are ensured even for long acquisitions. This is advantageous, for example, for capturing multiple packetized serial bus signals.

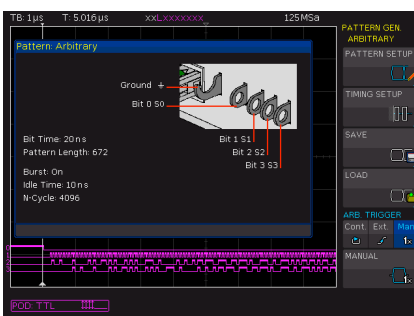


## Waveform and pattern generator

The integrated R&S®RTC-B6 waveform and pattern generator up to 50 Mbit/s is useful for educational purposes and for implementing prototype hardware. In addition to common sine, square/pulse, ramp and noise waveforms, it outputs 4-bit patterns. Waveforms and patterns can be imported as CSV files or copied from oscilloscope waveforms. You can preview signals before playing them back to quickly check signal correctness. Predefined patterns for e.g. I<sup>2</sup>C, SPI, UART and CAN/LIN are provided.

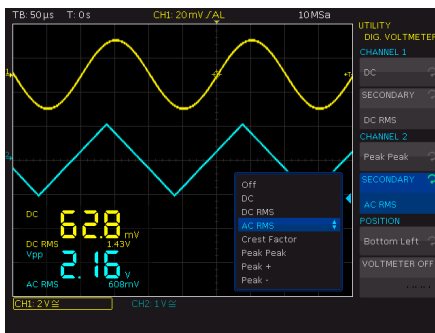


### Digital voltmeter

For simultaneous measurements, the R&S®RTC1000 features a three-digit digital voltmeter (DVM) and six-digit frequency counter on each channel. Provided measurement functions include DC, AC + DC (RMS) and AC (RMS).

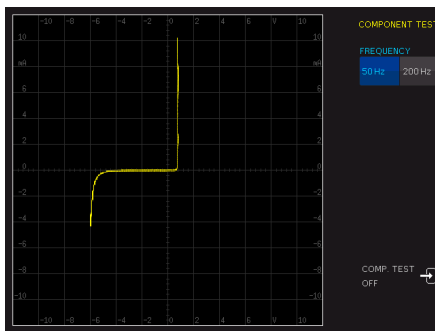


### Component tester

You will also benefit from the included component tester. A 50 Hz and a 200 Hz measuring frequency are provided to support your potentially tedious search for faulty components. And since a picture says more than a thousand words – or rather a thousand values – you will be able to tell at a glance if your error analysis is on track.

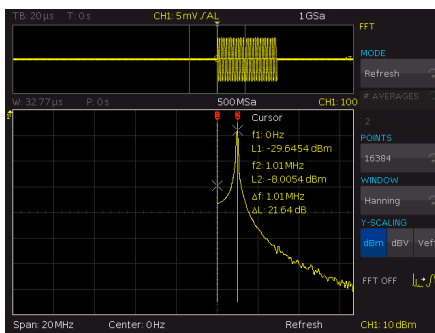

### Frequency analysis mode

Difficult-to-find faults often result from the interaction between time and frequency signals. The FFT function of the R&S®RTC1000 is activated at the push of a button and by simply entering the center frequency and span. Thanks to the R&S®RTC1000 oscilloscopes' high-performance FFT functionality, signals can be analyzed with up to 128k points. Other practical tools include cursor measurements and autoset in the frequency domain.

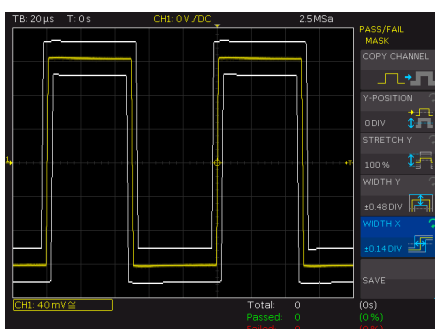

### Mask test mode

Mask tests quickly reveal whether a specific signal lies within defined tolerance limits. Masks assess the quality and stability of a DUT based on statistical pass/fail evaluation. Signal anomalies and unexpected results are quickly identified. When the mask is violated, the measurement stops. Each violation generates a pulse output at the AUX-OUT connector of the R&S®RTC1000. This pulse output can be used to trigger actions in the measurement setup.


# OSCILLOSCOPE PORTFOLIO



R&S®	RTH1000	RTC1000	RTB2000	RTM3000
<b>Vertical</b>				
Bandwidth	60/100/200/350/500 MHz <sup>1)</sup>	50/70/100/200/300 MHz <sup>1)</sup>	70/100/200/300 MHz <sup>1)</sup>	100/200/350/500 MHz/1 GHz <sup>1)</sup>
Number of channels	2 plus DMM/4	2	2/4	2/4
Resolution	10 bit	8 bit	10 bit	10 bit
V/div 1 MΩ	2 mV to 100 V	1 mV to 10 V	1 mV to 5 V	500 μV to 10 V
V/div 50 Ω	–	–	–	500 μV to 1 V
<b>Horizontal</b>				
Sampling rate per channel (in Gsample/s)	1.25 (4-channel model); 2.5 (2-channel model); 5 (all channels interleaved)	1; 2 (2 channels interleaved)	1.25; 2.5 (2 channels interleaved)	2.5; 5 (2 channels interleaved)
Maximum memory (per channel/1 channel active)	125 ksample (4-channel model); 250 ksample (2-channel model); 500 ksample (50 Msample in segmented memory mode)	1 Msample; 2 Msample	10 Msample; 20 Msample (320 Msample in segmented memory mode <sup>2)</sup> )	40 Msample; 80 Msample (400 Msample in segmented memory mode <sup>2)</sup> )
Segmented memory	standard	–	option	option
Acquisition rate (in waveforms/s)	50 000	10 000	50 000 (300 000 in fast segmented memory mode <sup>2)</sup> )	64 000 (2 000 000 in fast segmented memory mode <sup>2)</sup> )
<b>Trigger</b>				
Options	advanced, digital trigger (14 trigger types) <sup>2)</sup>	elementary (5 trigger types)	comprehensive (7 trigger types)	comprehensive (10 trigger types)
<b>Mixed signal option</b>				
Number of digital channels <sup>1)</sup>	8	8	16	16
Sampling rate of digital channels (in Gsample/s)	1.25	1	1.25	two logic probes: 2.5 on each channel; one logic probe: 5 on each channel
Memory of digital channels	125 ksample	1 Msample	10 Msample	two logic probes: 40 Msample per channel; one logic probe: 80 Msample per channel
<b>Analysis</b>				
Cursor meas. types	4	13	4	4
Standard meas. functions	37	31	32	32
Mask test	elementary (tolerance mask around the signal)	elementary (tolerance mask around the signal)	elementary (tolerance mask around the signal)	elementary (tolerance mask around the signal)
Mathematics	elementary	elementary	basic (math on math)	basic (math on math)
Serial protocols triggering and decoding <sup>1)</sup>	I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, CAN-FD, SENT	I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN	I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN	I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, I <sup>2</sup> S, MIL-STD-1553, ARINC 429
Display functions	data logger	–	–	–
Applications <sup>1), 2)</sup>	high-resolution frequency counter, advanced spectrum analysis, harmonics analysis, user scripting	digital voltmeter (DVM), component tester, fast Fourier transform (FFT)	digital voltmeter (DVM), fast Fourier transform (FFT), frequency response analysis	power, digital voltmeter (DVM), spectrum analysis and spectrogram, frequency response analysis
Compliance testing <sup>1), 2)</sup>	–	–	–	–
<b>Display and operation</b>				
Size and resolution	7", color, 800 × 480 pixel	6.5", color, 640 × 480 pixel	10.1", color, 1280 × 800 pixel	10.1", color, 1280 × 800 pixel
Operation	optimized for touchscreen operation, parallel button operation	optimized for fast button operation	optimized for touchscreen operation, parallel button operation	–
<b>General data</b>				
Dimensions in mm (W × H × D)	201 × 293 × 74	285 × 175 × 140	390 × 220 × 152	390 × 220 × 152
Weight in kg	2.4	1.7	2.5	3.3
Battery	lithium-ion, > 4 h	–	–	–

<sup>1)</sup> Upgradeable.<sup>2)</sup> Requires an option.



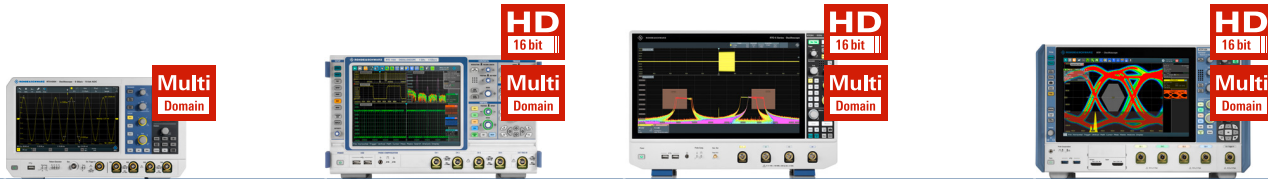

RTA4000	RTE1000	RT06	RTP
200/350/500 MHz/1 GHz <sup>1)</sup>	200/350/500 MHz/1/1.5/2 GHz <sup>1)</sup>	600 MHz/1/2/3/4/6 GHz <sup>1)</sup>	4/6/8/13/16 GHz <sup>1)</sup>
4	2/4	4	4
10 bit	16 bit system architecture	16 bit system architecture	16 bit system architecture
500 $\mu$ V to 10 V	500 $\mu$ V to 10 V	1 mV to 10 V (with HD mode: 500 $\mu$ V to 10 V)	
500 $\mu$ V to 1 V	500 $\mu$ V to 1 V	1 mV to 1 V (with HD mode: 500 $\mu$ V to 1 V)	2 mV to 1 V (with HD mode: 1 mV to 1 V)
2.5; 5 (2 channels interleaved)	5	10; 20 (2 channels interleaved in 4 GHz and 6 GHz model)	20; 40 (2 channels interleaved)
100 Msample; 200 Msample (1 Gsample in segmented memory mode)	50 Msample/200 Msample	standard: 200 Msample/800 Msample; max. upgrade: 1 Gsample/2 Gsample	standard: 50 Msample/200 Msample; max. upgrade: 1 Gsample/2 Gsample
standard	standard	standard	standard
64 000 (2 000 000 in fast segmented memory mode)	1 000 000 (1 600 000 in ultra-segmented memory mode)	1 000 000 (2 500 000 in ultra-segmented memory mode)	750 000 (3 200 000 in ultra-segmented memory mode)
comprehensive (10 trigger types)	advanced, digital trigger (13 trigger types)	advanced (includes zone trigger), digital trigger (14 trigger types)	advanced, digital trigger (14 trigger types) with real-time deembedding <sup>2)</sup> , high speed serial pattern trigger incl. 8/16 Gbps CDR <sup>2)</sup> , zone trigger <sup>2)</sup>
16	16	16	16
two logic probes: 2.5 on each channel; one logic probe: 5 on each channel	5	5	5
two logic probes: 100 Msample per channel; one logic probe: 200 Msample per channel	100 Msample	200 Msample	200 Msample
4	3	3	3
32	47	47	47
elementary (tolerance mask around the signal)	advanced (user-configurable, hardware based)	advanced (user-configurable, hardware based)	advanced (user-configurable, hardware based)
basic (math on math)	advanced (formula editor)	advanced (formula editor)	advanced (formula editor)
I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, I <sup>2</sup> S, MIL-STD-1553, ARINC 429	I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, I <sup>2</sup> S, MIL-STD-1553, ARINC 429, FlexRay <sup>TM</sup> , CAN-FD, USB 2.0/HSIC, Ethernet, Manchester, NRZ, SENT, SpaceWire, CXPI, USB Power Delivery, automotive Ethernet 100BASE-T1	I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, I <sup>2</sup> S, MIL-STD-1553, ARINC 429, FlexRay <sup>TM</sup> , CAN-FD, MIPI RFFE, USB 2.0/HSIC, MDIO, 8b10b, Ethernet, Manchester, NRZ, SENT, MIPI D-PHY, SpaceWire, MIPI M-PHY/UniPro, CXPI, USB 3.1 Gen1, USB-SSIC, PCIe 1.1/2.0, USB Power Delivery, automotive Ethernet 100BASE-T1/1000BASE-T1	I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, MIL-STD-1553, ARINC 429, CAN-FD, MIPI RFFE, USB 2.0/HSIC, MDIO, 8b10b, Ethernet, Manchester, NRZ, MIPI D-PHY, SpaceWire, MIPI M-PHY/UniPro, USB 3.1 Gen1/Gen2, USB-SSIC, PCIe 1.1/2.0/3.0, USB Power Delivery, automotive Ethernet 100BASE-T1/1000BASE-T1
–	histogram, trend, track <sup>2)</sup>	histogram, trend, track <sup>2)</sup>	histogram, trend, track
power, digital voltmeter (DVM), spectrum analysis and spectrogram, frequency response analysis	power, 16 bit high definition mode (standard), advanced spectrum analysis and spectrogram	power, 16 bit high definition mode (standard), advanced spectrum analysis and spectrogram, jitter and noise decomposition, clock data recovery, I/Q data, RF analysis, deembedding, TDR/TDT analysis	16 bit high definition mode, advanced spectrum analysis and spectrogram, jitter and noise decomposition, RF analysis, real-time deembedding, TDR/TDT analysis, I/Q data, HS serial pattern trigger with 8/16 Gbps CDR
–	–	see data sheet (PD 5216.1640.22)	see data sheet (PD 5215.4152.22)
10.1", color, 1280 $\times$ 800 pixel	10.4", color, 1024 $\times$ 768 pixel	15.6", color, 1920 $\times$ 1080 pixel	12.1", color, 1280 $\times$ 800 pixel
optimized for touchscreen operation, parallel button operation			
390 $\times$ 220 $\times$ 152	427 $\times$ 249 $\times$ 204	450 $\times$ 315 $\times$ 204	441 $\times$ 285 $\times$ 316
3.3	8.6	10.7	18
–	–	–	–

# SPECIFICATIONS IN BRIEF

Specifications in brief		
<b>Vertical system</b>		
Number of channels		2
Bandwidth (-3 dB)	R&S®RTC1002 (with R&S®RTC-B220/-B221/-B222/-B223)	50 MHz/70 MHz/100 MHz/200 MHz/300 MHz
Rise time (calculated)	R&S®RTC1002 (with R&S®RTC-B220/-B221/-B222/-B223)	7 ns/5 ns/3.5 ns/1.75 ns/1.15 ns
Input impedance		1 M $\Omega$ $\pm$ 2%    14 pF $\pm$ 2 pF
Input sensitivity	maximum bandwidth in all ranges	1 mV/div to 10 V/div
DC gain accuracy	offset and position = 0, maximum operating temperature	change of $\pm$ 5°C after self-alignment
	input sensitivity all ranges	3%
<b>Acquisition system</b>		
Maximum realtime sampling rate		1 Gsample/s, 2 Gsample interleaved
Acquisition memory		1 Msample, 2 Msample interleaved
<b>Horizontal system</b>		
Timebase range		1 ns/div to 100 s/div
<b>Trigger system</b>		
Trigger types	standard	edge, width, video (PAL, NTSC, SECAM, PAL-M, SDTV, HDTV), pattern, timeout
	option	I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN/LIN
<b>Analysis and measurement functions</b>		
QuickView	At the push of a button, internal measurement values are written directly onto the waveform and updated continuously.	peak-to-peak voltage, pos./neg. peak, rise/fall time, mean value, RMS value, time, frequency
Automated measurements		burst width, count positive/negative pulses, count falling/rising edges, mean value, RMS cycle, RMS, mean cycle, peak $\pm$ , frequency, period, amplitude, base level, pos./neg. overshoot, pulse width, duty cycle $\pm$ , rise/time, delay, phase
Waveform mathematics		addition, subtraction, multiplication, division, FFT
<b>MSO option</b>		
Digital channels		8 (1 logic probe)
Sampling rate		1 Gsample/s
Acquisition memory		1 Msample
<b>Waveform generator option</b>		
Resolution, sampling rate		8 bit, 978 ksample/s
Amplitude	high Z; 50 $\Omega$	60 mV to 6 V ( $V_{pp}$ ); 30 mV to 3 V ( $V_{pp}$ )
DC offset	sine	0.1 Hz to 50 kHz
	pulse/rectangle and ramp/triangle	0.1 Hz to 10 kHz
<b>4-bit pattern generator option</b>		
Programmable pattern	sample time	20 ns to 42 s, up/down
	memory depth	2048 sample
4-bit counter	frequency	100 mHz to 50 MHz
Square wave	frequency	1 mHz to 500 kHz
<b>Digital voltmeter</b>		
Measurements	DC, AC + DC (RMS), AC (RMS) resolution	up to 3 digits
<b>Frequency counter</b>		
Resolution		5 digits
<b>General data</b>		
Screen		6.5" VGA color display (640 $\times$ 480 pixel)
Interfaces		1 $\times$ USB host, USB device, LAN
Audible noise	maximum sound pressure level at a distance of 0.3 m	30.4 dB(A)
Dimensions	W $\times$ H $\times$ D	285 mm $\times$ 175 mm $\times$ 140 mm (11.22 in $\times$ 6.89 in $\times$ 5.51 in)
Weight		1.7 kg (3.75 lb)

# ORDERING INFORMATION

Designation	Type	Order No.
<b>R&amp;S®RTC1000 base model</b>		
Oscilloscope, 50 MHz, 2 channels	R&S®RTC1002	1335.7500P02
Base unit (including standard accessories: R&S®RT-ZP03S passive probe per channel, R&S®RTC-B6 waveform generator, power cord, getting started manual and safety instructions)		
<b>Choose your bandwidth upgrade</b>		
Upgrade of R&S®RTC1002 to 70 MHz bandwidth	R&S®RTC-B220	1335.7300.03
Upgrade of R&S®RTC1002 to 100 MHz bandwidth	R&S®RTC-B221	1335.7317.03
Upgrade of R&S®RTC1002 to 200 MHz bandwidth	R&S®RTC-B222	1335.7275.03
Upgrade of R&S®RTC1002 to 300 MHz bandwidth	R&S®RTC-B223	1335.7323.03
<b>Choose your options</b>		
Mixed signal upgrade for non-MSO models, 300 MHz	R&S®RTC-B1	1335.7281.03
Waveform generator	R&S®RTC-B6	1335.7298.03
I <sup>2</sup> C/SPI serial triggering and decoding	R&S®RTC-K1	1335.7230.03
UART/RS-232/RS-422/RS-485 serial triggering and decoding	R&S®RTC-K2	1335.7246.03
CAN/LIN serial triggering and decoding	R&S®RTC-K3	1335.7252.03
Application bundle, consists of the following options: R&S®RTC-K1, R&S®RTC-K2, R&S®RTC-K3, R&S®RTC-B6	R&S®RTC-PK1	1335.7330.03
<b>Choose your additional probes</b>		
<b>Single-ended passive probes</b>		
300 MHz, 10:1, 10 M $\Omega$ , 400 V, 12 pF	R&S®RT-ZP03S	1803.1001.02
500 MHz, 10 M $\Omega$ , 10:1, 300 V, 10 pF, 5 mm	R&S®RT-ZP05S	1333.2401.02
500 MHz, 10 M $\Omega$ , 10:1, 400 V, 9.5 pF	R&S®RTM-ZP10	1409.7708.02
38 MHz, 1 M $\Omega$ , 1:1, 55 V, 39 pF	R&S®RT-ZP1X	1333.1370.02
<b>High voltage single-ended passive probes</b>		
250 MHz, 100:1, 100 M $\Omega$ , 850 V, 6.5 pF	R&S®RT-ZH03	1333.0873.02
400 MHz, 100:1, 50 M $\Omega$ , 1000 V, 7.5 pF	R&S®RT-ZH10	1409.7720.02
400 MHz, 1000:1, 50 M $\Omega$ , 1000 V, 7.5 pF	R&S®RT-ZH11	1409.7737.02
<b>Current probes</b>		
20 kHz, AC/DC, 10 A/1000 A	R&S®RT-ZC02	1333.0850.02
100 kHz, AC/DC, 30 A	R&S®RT-ZC03	1333.0844.02
10 MHz, AC/DC, 150 A	R&S®RT-ZC10	1409.7750.02
100 MHz, AC/DC, 30 A	R&S®RT-ZC20	1409.7766.02
120 MHz, AC/DC, 5 A	R&S®RT-ZC30	1409.7772.02
Power supply for current probes	R&S®RT-ZA13	1409.7789.02
<b>Active differential probes</b>		
100 MHz, 1000:1/100:1, 8 M $\Omega$ , 1000 V (RMS), 3.5 pF	R&S®RT-ZD01	1422.0703.02
200 MHz, 10:1, 1 M $\Omega$ , 20 V diff., 3.5 pF	R&S®RT-ZD02	1333.0821.02
<b>Logic probes</b>		
Active 8 channel logic probe	R&S®RT-ZL03	1333.0715.02
<b>Probe accessories</b>		
Feedthrough termination 50 $\Omega$	R&S®HZ22	3594.4015.02
Adapter, BNC to 4 mm dual banana	R&S®RT-ZA11	1333.0796.02
Probe pouch	R&S®RT-ZA19	1335.7875.02
<b>Choose your accessories</b>		
Soft case, for R&S®RTC1002 oscilloscope and accessories	R&S®RTC-Z3	1333.0867.02
Rackmount kit	R&S®ZZA-RTC1K	1333.0967.02

## Service options

Extended warranty, one year/two years	Please contact your local Rohde & Schwarz sales office.
Extended warranty with calibration coverage, one year/two years	
Extended warranty with accredited calibration coverage, one year/two years	

Service that adds value

Worldwide  
Local and personalized  
Customized and flexible  
Uncompromising quality  
Long-term dependability

**Rohde & Schwarz**

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 85 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

**Sustainable product design**

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership



**Rohde & Schwarz training**

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)


**Rohde & Schwarz customer support**

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)



# R&S® RTC1000 OSCILLOSCOPE

## Specifications

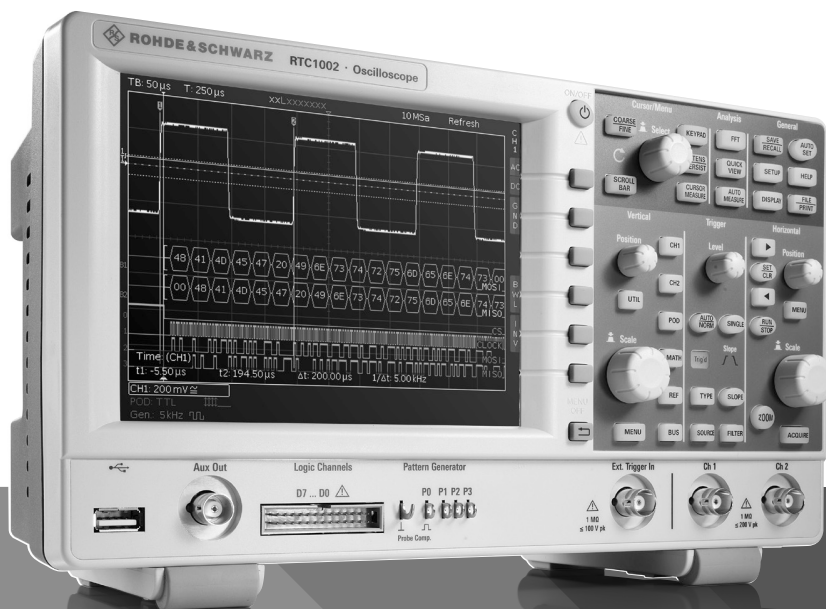

Data Sheet  
Version 08.00

**ROHDE & SCHWARZ**

Make ideas real



Version 08.00, July 2022

**CONTENTS**

<b>Definitions .....</b>	<b>3</b>
<b>Base unit.....</b>	<b>4</b>
Vertical system .....	4
Horizontal system.....	4
Acquisition system.....	4
Trigger system.....	5
Waveform measurements.....	6
Digital voltmeter.....	6
Frequency counter.....	6
Component tester .....	6
Mask testing .....	7
Waveform maths .....	7
Frequency analysis (FFT).....	7
Reference signals.....	7
Display characteristics.....	7
Protocol and logic.....	8
Miscellaneous.....	8
Input and outputs.....	9
<b>General data .....</b>	<b>10</b>
<b>Options .....</b>	<b>11</b>
R&S®RTC-B1 .....	11
R&S®RTC-B6 .....	12
R&S®RTC-Bxx bandwidth upgrades .....	12
R&S®RTC-K1 .....	13
R&S®RTC-K2 .....	13
R&S®RTC-K3 .....	14
<b>Ordering information .....</b>	<b>16</b>

## Definitions


### General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

### Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

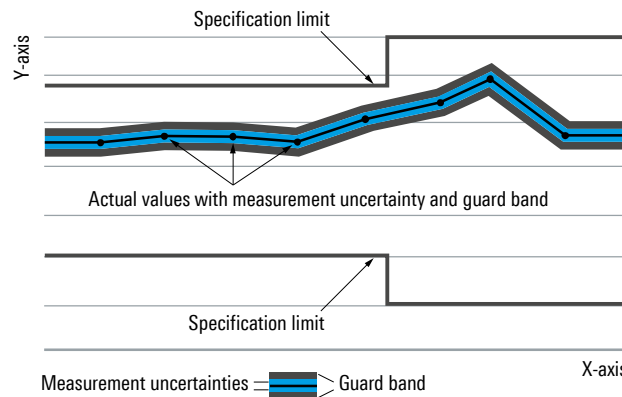

### Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under "Specifications with limits" above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

### Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

### Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

### Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

### Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

### Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format "parameter: value".

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP/3GPP2 standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (MSPS) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, MSPS, kbps, ksps and Msample/s are not SI units.

Version 08.00, July 2022

## Base unit

### Vertical system

Input channels	R&S®RTC1002	2 channels
Input impedance	R&S®RTC1002	1 MΩ ± 2 % with 14 pF ± 2 pF (meas.)
Analog bandwidth (–3 dB)	R&S®RTC1002	> 50 MHz
	R&S®RTC1002 with -B220 option	> 70 MHz
	R&S®RTC1002 with -B221 option	> 100 MHz
	R&S®RTC1002 with -B222 option	> 200 MHz (≥ 5 mV/div)
	R&S®RTC1002 with -B223 option	> 300 MHz (≥ 5 mV/div)
Lower frequency limit (–3 dB)	at AC coupling	< 2 Hz (meas.)
Analog bandwidth limits (max. –1.8 dB, min. –3.5 dB)		20 MHz (meas.)
Rise time (10 % to 90 %, calculated)	R&S®RTC1002	< 7 ns
	R&S®RTC1002 with -B220 option	< 5 ns
	R&S®RTC1002 with -B221 option	< 3.5 ns
	R&S®RTC1002 with -B222 option	< 1.75 ns
	R&S®RTC1002 with -B223 option	< 1.15 ns
Vertical resolution		8 bit, up to 16 bit with high-resolution decimation mode
Invert signal		yes
DC gain accuracy	maximum operating temperature change of	±5 °C after self-alignment
	all input sensitivities	±3 % of full scale
DC measurement accuracy	after adequate suppression of measurement noise by using high-resolution sampling mode or waveform averaging	±(DC gain accuracy ×  reading + sensitivity × position setting  + 0.1 div + 1 mV)
Input coupling		DC, AC, GND
Input sensitivity		1 mV/div to 10 V/div
Maximum input voltage		max. 200 V (V <sub>p</sub> ), derates at 20 dB/decade to 5 V (RMS) above 100 kHz
Position range		±15 div
Channel-to-channel isolation (each channel at same input sensitivity)	input frequency < analog bandwidth	> 35 dB (meas.)

### Horizontal system

Timebase range		selectable between 1 ns/div and 100 s/div
Channel deskew		±120 ns
Trigger offset range	minimum	memory depth/actual sampling rate
	maximum	2 <sup>33</sup> /actual sampling rate
Modes		normal, roll ≥ 50 ms/div
Timebase accuracy	after delivery/calibration, at +23 °C	±50 ppm
	during calibration interval	±60 ppm

### Acquisition system

Maximum realtime sampling rate		2 × 1 Gsample/s or 1 × 2 Gsample/s
Memory depth per channel		2 × 1 Msample or 1 × 2 Msample
Acquisition modes	refresh	first sample in decimation interval
	peak detect	largest and smallest sample in decimation interval (1 ns detection)
	high resolution	average value of all samples in decimation interval (up to 16 bit)
	envelope	envelope of acquired waveforms
	average	average over a series of acquired waveforms
	filter	low-pass, adjustable
	smooth	
Number of averaged waveforms		2 to 1024
Waveform acquisition rate	dot display, single channel, max. waveform rate	up to 10 000 waveforms/s



## Trigger system

Trigger level	range (min)	±15 div from center of screen
Trigger modes		auto, normal, single
Hold-off range	time	auto or 50 ns to 10 s
Trigger types		edge, pulse, video, logic, serial bus
Edge trigger	trigger events	rising edge, falling edge, both edges
	sources	channel 1, channel 2, logic channels from D7 to D0 (with R&S®RTC-B1 option), external trigger input, line
	coupling (analog channels, external trigger input)	DC, AC, auto level, low pass (attenuates > 5 kHz (meas.)), HF (attenuates < 30 kHz (meas.)), noise reject (enlarges trigger hysteresis)
Pulse trigger	trigger events	pulse width is smaller, greater, equal, unequal, inside interval, outside interval
	min. pulse width	8 ns
	max. pulse width	17.1 s
	polarity	positive, negative
	sources	channel 1, channel 2, logic channels from D7 to D0 (with R&S®RTC-B1 option)
Video trigger	trigger events	selectable line, all lines, even frame, odd frame, all frames
	supported standards	PAL, NTSC, SECAM, PAL-M, SDTV 576i, HDTV 720p, HDTV 1080i, HDTV 1080p
	sources	channel 1, channel 2
	sync pulse polarity	positive, negative
Logic trigger	trigger events	logic condition between active channels
	sources	channel 1, channel 2, logic channels from D7 to D0 (with R&S®RTC-B1 option)
	state of channels	high, low, don't care
	logic between channels	and/or
	condition	true, false
	duration condition	smaller, greater, equal, unequal, inside interval, outside interval, timeout
	min. duration time	8 ns
	max. duration time	17.1 s
Serial bus trigger	supported standards	
	R&S®RTC-K1 option	I <sup>2</sup> C/SPI (two- and three-wire)
	R&S®RTC-K2 option	UART/RS-232/RS-422/RS-485
	R&S®RTC-K3 option	CAN/LIN
Trigger sensitivity	with DC, AC, LF reject	
	input sensitivity ≥ 5 mV/div	< 0.8 div (meas.)
	input sensitivity < 5 mV/div	< 1.5 div (meas.)
	with HF reject	
	all input sensitivities	< 1 div (meas.)
with noise rejection		
	input sensitivity > 5 mV/div	< 1.5 div (meas.)
External trigger input	input impedance	1 MΩ ± 1 % with 14 pF ± 2 pF (meas.)
	maximum input voltage at 1 MΩ	max. 100 V (V <sub>p</sub> ), derates at 20 dB/decade to 5 V (RMS) above 100 kHz
	trigger level	±5 V
	sensitivity	300 mV (V <sub>pp</sub> )
	input coupling	DC, AC
Trigger output (AUX OUT connector)	functionality	A pulse is generated for every acquisition trigger event.
	output voltage	
	at high impedance	0 V to 3.0 V
	pulse polarity	high active
	output delay	depends on trigger settings
	pulse width	> 150 ns (trigger event)
		> 0.5 μs (mask violation)

Version 08.00, July 2022

## Waveform measurements

Automatic measurements	measurements on channels, math waveforms, reference waveforms	burst width, count positive pulses, count negative pulses, count falling edges, count rising edges, mean value, RMS, peak-to-peak, peak+, peak-, frequency, period, amplitude, crest factor, top level, base level, pos overshoot, neg overshoot, pulse width+, pulse width-, duty cycle+, duty cycle-, rise time (80 %, 90 %), fall time (80 %, 90 %), delay, phase, standard deviation
	measurements on trigger signal	trigger period, trigger frequency implemented by means of six-digit hardware counter
	number of active measurements	6
Cursor measurements	measurements on channels, math waveforms, reference waveforms	voltage (V1, V2, $\Delta V$ ), time (t1, t2, $\Delta t$ , $1/\Delta t$ ), ratio X, ratio Y, pulse and edge count (pos./neg.), peak values ( $V_{pp}$ , $V_{p+}$ , $V_{p-}$ ), $V_{mean}$ , $V_{RMS}$ , standard deviation, duty cycle (pos./neg.), rise/fall time (80 %, 90 %), crest factor, voltage at the cursor position
	functions	x and y tracking, coupling of cursors, set to screen, set to trace, automatic source
Quick measurements	function	fast overview of measurements from one channel, some measurements displayed with result lines in diagram
	sources	channel 1, channel 2
	measurements displayed in diagram	mean value, max. peak, min. peak, rise time, fall time
	numerically displayed measurements	RMS, peak-to-peak voltage, period, frequency, plus 6 automatic measurements selectable
Marker		up to 8 freely positionable markers for easy navigation

## Digital voltmeter

Accuracy		related to channel settings of voltmeter source
Measurements		DC, AC + DC (RMS), AC (RMS)
Sources		channel 1, channel 2
Number of measurements		up to 4
Resolution		up to 3 digits
Bandwidth		> 1 MHz

## Frequency counter

Measurements		frequency, period
Sources		trigger signal source (edge, video): line, channel 1, channel 2, external trigger in
Number of measurements		2
Resolution		5 digits
Frequency range		0.03 Hz to bandwidth of oscilloscope (limited by bandwidth of trigger filter)

## Component tester

Parameters		voltage (X), current (Y)
Selectable frequencies		50 Hz, 200 Hz
Component tester output (AUX OUT connector)	max. output voltage (open circuit)	10 V ( $V_p$ ) $\pm$ 5 %
	max. output current (short circuit)	10 mA $\pm$ 10 %
	reference potential	ground

## Mask testing

Sources		channel 1, channel 2
Mask definition		acquired waveform with user-defined tolerance, can be stored and restored
Result statistics		completed acquisitions, passed and failed acquisitions (absolute and in percent), test duration
Actions on mask violation		sound, acquisition stop, screenshot, save waveform, pulse out (AUX OUT connector)

## Waveform maths

Quick math	number of math waveforms	1
	functions	addition, subtraction, multiplication, division
	sources	channel 1, channel 2
Mathematics	number of formula sets	5
	number of equations per set	5
	simultaneous display of math waveforms	4
	functions	addition, subtraction, multiplication, division, min./max., square, square root, absolute value, pos./neg. wave, reciprocal, inverse, log10/ln, derivation, integration, filter (lowpass/highpass)
	sources	channel 1, channel 2, math, user defined constants

## Frequency analysis (FFT)

Setup parameters		center frequency, frequency span, vertical scale, vertical position
Length		2 ksample to 128 ksample
Window		Hanning, Hamming, Blackman, rectangular, flat top
Waveform arithmetic		none, envelope, average (selectable 2 to 512)
Scale		dBm, dBV, $V_{eff}$
Cursor		2 horizontal cursors, previous/next peak search
Sources		channel 1, channel 2

## Reference signals

Simultaneous display of reference waveforms		4
Sources		analog and digital channels, math, reference

## Display characteristics

Diagram types		Yt, XY, zoom, FFT, component tester
XY mode		parallel display of XY diagram and Yt diagrams of input signals for X, Y
Zoom		horizontal zoom with fast navigation, split screen with overview signal and zoomed signal
FFT mode		split screen with overview signal and dedicated frequency display
Interpolation		sin(x)/x, linear, sample & hold
Waveform display		lines, dots only
Persistence		50 ms to 9.6 s, infinite
Special display mode		inverse brightness, false colors
Diagram grid		lines, reticle, none
Virtual screen		20 divisions

Version 08.00, July 2022

## Protocol and logic

Bus decode	number of bus signals	2 <sup>1</sup>
	bus types	parallel, parallel clocked
	R&S®RTC-K1 option	SSPI, SPI, I <sup>2</sup> C
	R&S®RTC-K2 option	UART/RS-232/RS-422/RS-485
	R&S®RTC-K3 option	CAN, LIN
	display types	decoded bus, logical signal, frame table (depends on decoded bus)
	data format of decoded bus	hex, decimal, binary

## Miscellaneous

Save/recall	device settings	save and recall on internal file system or USB flash drive or on a PC via web interface
	reference waveforms	save and recall on internal file system or USB flash drive or on a PC via web interface
	waveforms	save on USB flash drive or download and save on a PC via web interface available file formats: BIN, CSV, TXT float (MSB/LSB first)
	screenshots	save on USB flash drive or download and save on a PC via web interface, available file formats: BMP, PNG, GIF
Print button		configurable button, actions on press: <ul style="list-style-type: none"> <li>• save device settings</li> <li>• save waveforms</li> <li>• save screenshot</li> <li>• save screenshot and setup</li> </ul>
Menu languages		available menu languages: <ul style="list-style-type: none"> <li>• English</li> <li>• German</li> <li>• French</li> <li>• Russian</li> <li>• Simplified Chinese</li> <li>• Traditional Chinese</li> <li>• Spanish</li> </ul>
Help		online help, available languages: <ul style="list-style-type: none"> <li>• English</li> <li>• German</li> <li>• French</li> <li>• Simplified Chinese</li> <li>• Spanish</li> </ul>

<sup>1</sup> If a bidirectional bus is used (e.g. UART RX/TX or SPI MOSI/MISO), two bus decoders are occupied.

## Input and outputs

<b>Front</b>		
Channel inputs		BNC, for details see Vertical system
External trigger input	trigger in	BNC, for details see Trigger system
	additional digital channel	for level see Trigger system
AUX OUT	trigger out	for details see Trigger system
	mask violation	pulse
	waveform generator (with R&S®RTC-B6 option only)	BNC, for details see Waveform generator
Probe compensation output	signal shape rectangle	$V_{\text{low}} = 0 \text{ V}$ , $V_{\text{high}} = 2.4 \text{ V}$ (meas.)
	frequency	1 kHz and 1 MHz with probe adjust wizard
Pattern source (with R&S®RTC-B6 option only)	P3 to P0 (with R&S®RTC-B6 option only)	4 lugs, for details see 4-bit pattern generator
Digital channel inputs	D7 to D0	with R&S®RTC-B1 option only
Ground lug		connected to ground
USB host interface		1 port, type A plug, version 2.0, USB drives only
<b>Rear</b>		
USB device interface		1 port, type B plug, version 2.0
Ethernet interface		1 port, <a href="#">RJ-45 connector</a>
Security slot		for standard Kensington style lock

Version 08.00, July 2022

## General data

<b>Display</b>		
Type		6.5" VGA color display
Resolution		640 × 480 pixel (VGA)
<b>Temperature</b>		
Temperature loading	operating temperature range storage temperature range	+5 °C to +40 °C -20 °C to +70 °C
Climatic loading		+25° C/+40 °C at 85 % rel. humidity cyclic, in line with IEC 60068-2-30
<b>Altitude</b>		
Operating		up to 3000 m above sea level
Nonoperating		up to 4600 m above sea level
<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 150 Hz, max. 1.8 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz, in line with EN 60068-2-6, MIL-PRF-28800F, 4.5.5.3.2 sinusoidal vibration, class 3 and 4
	random	10 Hz to 300 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64, MIL-PRF-28800F, 4.5.5.3.1 random vibration, class 3 and 4
Shock		40 g shock spectrum, in line with MIL-STD-810E, method no. 516.4, procedure I, MIL-PRF-28800F, 4.5.5.4.1 functional shock, 30 g, 11 ms, halfsine
Maximum of sound pressure level		30.4 dB (A) at 0.3 m distance (at +23.6 °C, 931 mbar (hPa), 39 % rel. humidity), in line with EN ISO 3744
<b>EMC</b>		
RF emission		in line with CISPR 11/EN 55011 group 1 class A (for a shielded test setup); the instrument complies with the emission requirements stipulated by EN 55011, EN 61326-1 and EN 61326-2-1 class A, making the instrument suitable for use in industrial environments
Immunity		in line with IEC/EN 61326-1 table 2, immunity test requirements for industrial environments <sup>2</sup>
Certifications		VDE, cCSA <sub>US</sub>
Calibration interval		1 year
<b>Power supply</b>		
AC supply		100 V to 240 V at 50 Hz to 60 Hz, 100 V to 120 V at 400 Hz
Power consumption		max. 25 W
Safety		in line with IEC 61010-1, EN 61010-1, CAN/CSA-C22.2 No. 61010-1, UL 61010-1
<b>Mechanical data</b>		
Dimensions	W × H × D	285 × 175 × 140 mm (11.22 in × 6.89 in × 5.51 in)
Weight	without options (nom.)	1.7 kg (3.75 lb)

<sup>2</sup> Test criterion is displayed noise level within ±1 div for input sensitivity of 5 mV/div.

## Options

### R&S®RTC-B1

<b>Mixed signal option</b> , additional 8 logic channels		
Vertical system		
Input channels		8 logic channels (D7 to D0)
Arrangement of input channels		assignment of the logic probes to the channels D7 to D0
Input impedance		100 k $\Omega$ $\pm$ 2 %    ~4 pF (meas.) at probe tips
Maximum input frequency	signal with minimum input voltage swing and hysteresis setting: normal	300 MHz (meas.)
Maximum input voltage		$\pm$ 40 V ( $V_p$ )
Minimum input voltage swing	hysteresis small	300 mV ( $V_{pp}$ ) (meas.)
	hysteresis medium	800 mV ( $V_{pp}$ ) (meas.)
	hysteresis large	1500 mV ( $V_{pp}$ ) (meas.)
Threshold groups		D7 to D0
Threshold level	range	-2 V to 8 V in 10 mV steps
	predefined	CMOS, TTL, ECL
Threshold accuracy		$\pm$ (100 mV + 3 % of threshold setting) (meas.)
Comparator hysteresis		small, medium, large
Horizontal system		
Channel-to-channel skew		max. 1 ns (meas.)
Acquisition system		
Sampling rate		1 Gsample/s for every channel
Memory depth		1 Msample for every channel
Trigger system		see Trigger system
Waveform measurements		
Measurement sources		all channels from D7 to D0
Automatic measurements		positive pulse width, negative pulse width, period, frequency, burst width, delay, phase, positive duty cycle, negative duty cycle, positive pulse count, negative pulse count, rising edge count, falling edge count, value at the cursor position
Additional cursor function		display of decoded parallel bus value at the cursor position
Display characteristics		
Channel activity display		Independent of the oscilloscope acquisition, the state (stays low, stays high or toggles) of the channels from D7 to D0 is displayed.

Version 08.00, July 2022

**R&S®RTC-B6**

<b>Waveform generator</b>		
Resolution		8 bit
Sample rate		978 ksample/s
Amplitude	level	
	high Z	60 mV to 6 V ( $V_{pp}$ )
	accuracy	3 % at 1 kHz
DC offset	level	
	high Z	$\pm 3$ V
	accuracy	3 % or $\pm 25$ mV (meas.)
Sine/rectangle	frequency	0.1 Hz to 50 kHz
Pulse	frequency	0.1 Hz to 10 kHz
Ramp/triangle	frequency	0.1 Hz to 10 kHz
<b>4-bit pattern generator</b>		
Functions		bus signal source 4-bit counter, programmable 4-bit pattern
Amplitude		approx. 2.5 V ( $V_{pp}$ )
Bus signal source		SPI, I <sup>2</sup> C, UART, CAN, LIN
	bit rate	
	UART	9600 bit/s, 115.2 kbit/s, 1 Mbit/s
	SPI	100 kbit/s, 250 kbit/s, 1Mbit/s
	I <sup>2</sup> C	100 kbit/s, 400 kbit/s, 1000 kbit/s, 3400 kbit/s
	CAN	50 kbit/s, 100 kbit/s, 1 Mbit/s
	LIN	9.6 kbit/s, 10.417 kbit/s, 19 kbit/s
4-bit counter	frequency	100 mHz to 50 MHz
Squarewave	frequency	1 mHz to 500 kHz
	duty cycle	1 % to 99 %
Programmable pattern	sample time	20 ns to 42 s, up/down
	memory depth	2048 sample
	pattern idle time	20 ns to 42 s

**R&S®RTC-Bxx bandwidth upgrades**

Option	Model	Analog bandwidth upgrade from 50 MHz to
R&S®RTC-B220	R&S®RTC1002	70 MHz
R&S®RTC-B221	R&S®RTC1002	100 MHz
R&S®RTC-B222	R&S®RTC1002	200 MHz
R&S®RTC-B222	R&S®RTC1002	300 MHz



**R&S®RTC-K1**

<b>I<sup>2</sup>C triggering and decoding</b>		
Bus configuration	sources for SCL and SDA	channel 1, channel 2, logic channels from D7 to D0
	bit rate	up to 10 Mbps
	size of address	7 bit or 10 bit
	size of data	8 bit
	label list	associate frame identifier with symbolic ID
Trigger	trigger events	start, stop, restart, missing acknowledge, address (7 bit or 10 bit), data, address and data
	offset for trigger on data	0 data byte to 4095 data byte
	data pattern width	up to 3 sequential data byte
Decode	displayed signals	bus signal, logic signal or both
	color coding of bus signal	address, data, start, stop, ACK, NACK; error and trigger event are displayed in different colors
	displayed format of address	hex
	displayed format of data	ASCII, binary, decimal or hex
<b>SPI triggering and decoding</b>		
Bus configuration	sources for CS, CLK, data	channel 1, channel 2, logic channels from D7 to D0, extern input (only CS)
	bit rate	up to 25 Mbps
	chip select (CS)	active low, active high or missing (two-wire SPI)
	clock (CLK) slope	rise or fall
	data symbol size	1 bit to 32 bit
	idle time for two-wire SPI	< 1 ms
Trigger	trigger events	start of frame, end of frame, bit number, data pattern
	selectable bit number	0 to 4095
	offset for trigger on data pattern	0 to 4095 bit
	data pattern size	1 bit to 32 bit
Decode	displayed signals	bus signal, logic signal or both
	color coding of bus signal	data, start, stop; error and trigger event are displayed in different colors
	displayed format of data	ASCII, binary, decimal or hex
	data decoding	MSB or LSB first

**R&S®RTC-K2**

<b>UART/RS-232/RS-422/RS-485 triggering and decoding</b>			
Bus configuration	source for data	channel 1, channel 2, logic channels from D7 to D0	
	bit rate	300/600/1200/2400/4800/9600/14400/19200/28800/38400/56000/57600/115200 bps 128 kbps/256 kbps/1 Mbps or user-selectable up to 3 Mbps	
	end of frame	timeout, none	
	signal polarity	idle low, idle high	
	data symbol size	5 bit to 9 bit	
	parity	none, even or odd	
	stop bits	1, 1.5 or 2	
	Trigger	trigger events	start bit, start of frame, symbol number, any symbol, pattern of symbols, parity error, frame error, break
		offset for trigger on data symbol	0 to 4095 symbols
data symbol pattern width		1 to floor (32/symbol size) symbols	
Decode	displayed signals	bus signal, logic signal or both	
	color coding of bus signal	data, start, stop; error and trigger event are displayed in different colors	
	displayed format of data	ASCII, binary, decimal or hex	

Version 08.00, July 2022

**R&S®RTC-K3**

<b>CAN triggering and decoding</b>		
Bus configuration	signal type	CAN_H, CAN_L
	sources	channel 1, channel 2, logic channels from D7 to D0
	bit rate	10/20/33.3/50/83.3/100/125/250/500/1000 kbps or user-selectable in range from 100 bps to 2 Mbps
	sampling point	10 % to 90 % within bit period
	label list	associate frame identifier with symbolic ID
Trigger	trigger events	start of frame, frame type, identifier, identifier + data, error condition (any combination of CRC error, bit stuffing error, form error and ACK error)
	identifier setup	frame type (data, remote or both), identifier type (11 bit or 29 bit); condition =, ≠, >, <; identifier selectable from label list
	data setup	data pattern up to 8 byte (hex or binary); condition =, ≠, >, <
Decode	displayed signals	bus signal, logic signal or both
	color coding of bus signal	start of frame, identifier, DLC, data payload, CRC, ACK, end of frame, error frame, overload frame, CRC error, bit stuffing error, ACK error
	displayed format of data	hex, decimal, binary, ASCII
Search	frame table	decode results displayed as tabulated list, errors highlighted in red; three table positions (top, bottom, full screen); frame navigation; data export as CSV file
	search events	frame, error, identifier, identifier + data, identifier + error
	frame event setup	start of frame, end of frame, overload frame, error frame, data ID 11 bit, data ID 29 bit, remote ID 11 bit, remote ID 29 bit
	error event setup	any combination of CRC error, bit stuffing error, form error and ACK error
	identifier setup	frame type (data, remote or both), identifier type (11 bit or 29 bit); condition =, ≠, >, <; identifier selectable from label list
	data setup	data pattern up to 8 byte (hex or binary); condition =, ≠, >, <
	event table	search results displayed as tabulated list; event navigation

<b>LIN triggering and decoding</b>		
Bus configuration	version	1.3, 2.x or SAE J602; mixed traffic is supported
	bit rate	1.2/2.4/4.8/9.6/10.417/19.2 kbps or user-selectable in range from 1 kbps to 5 Mbps
	polarity	active high or active low
	label list	associate frame identifier with symbolic ID
Trigger	source	any input channel
	trigger events	start of frame (sync break), identifier, identifier + data, wakeup frame, error condition (any combination of checksum error, parity error and sync field error)
	identifier setup	range from 0d to 63d; condition =, ≠, >, <; identifier selectable from label list
	data setup	data pattern up to 8 byte (hex or binary); condition =, ≠, >, <
Decode	displayed signals	bus signal, logic signal or both
	color coding of bus signal	frame, frame identifier, parity, data payload, checksum, error condition
	displayed format of data	hex, decimal, binary, ASCII
	frame table	decode results displayed as tabulated list, errors highlighted in red; three table positions (top, bottom, full screen); frame navigation; data export as CSV file
Search	search events	frame, error, identifier, identifier + data, identifier + error
	frame event setup	start of frame, wake up
	error event setup	any combination of checksum error, parity error and sync field error
	identifier setup	range from 0d to 63d; condition =, ≠, >, <; identifier selectable from label list
	data setup	data pattern up to 8 byte (hex or binary); condition =, ≠, >, <
	event table	search results displayed as tabulated list; event navigation

Version 08.00, July 2022

## Ordering information

Designation	Type	Order No.
<b>R&amp;S®RTC1000 base model</b>		
Oscilloscope, 50 MHz, 2 channels	R&S®RTC1002	1335.7500.P02
Base unit (including standard accessories: 300 MHz passive probe per channel, R&S®RTC-B6 waveform generator, power cord, getting started manual and safety instructions)		
<b>Choose your bandwidth upgrade</b>		
Upgrade of R&S®RTC1002 to 70 MHz bandwidth	R&S®RTC-B220	1335.7300.03
Upgrade of R&S®RTC1002 to 100 MHz bandwidth	R&S®RTC-B221	1335.7317.03
Upgrade of R&S®RTC1002 to 200 MHz bandwidth	R&S®RTC-B222	1335.7275.03
Upgrade of R&S®RTC1002 to 300 MHz bandwidth	R&S®RTC-B223	1335.7323.03
<b>Choose your options</b>		
Mixed signal upgrade for non-MSO models, 300 MHz	R&S®RTC-B1	1335.7281.03
Waveform generator	R&S®RTC-B6	1335.7298.03
I <sup>2</sup> C/SPI serial triggering and decoding	R&S®RTC-K1	1335.7230.03
UART/RS-232/RS-422/RS-485 serial triggering and decoding	R&S®RTC-K2	1335.7246.03
CAN/LIN serial triggering and decoding	R&S®RTC-K3	1335.7252.03
Application bundle, consists of the following options: R&S®RTC-K1, R&S®RTC-K2, R&S®RTC-K3, R&S®RTC-B6	R&S®RTC-PK1	1335.7330.03
<b>Choose your additional probes</b>		
Single-ended passive probes		
300 MHz, 10 MΩ, 10:1, 400 V (RMS), 12 pF	R&S®RT-ZP03S	1803.1001.02
500 MHz, 10 MΩ, 10:1, 300 V (RMS), 10 pF	R&S®RT-ZP05S	1333.2401.02
500 MHz, 10 MΩ, 10:1, 400 V, 9.5 pF	R&S®RTM-ZP10	1409.7708.02
38 MHz, 1 MΩ, 1:1, 55 V, 39 pF	R&S®RT-ZP1X	1333.1370.02
High voltage single-ended passive probes		
250 MHz, 100:1, 100 MΩ, 850 V, 6.5 pF	R&S®RT-ZH03	1333.0873.02
400 MHz, 100:1, 50 MΩ, 1000 V, 7.5 pF	R&S®RT-ZH10	1409.7720.02
400 MHz, 1000:1, 50 MΩ, 1000 V, 7.5 pF	R&S®RT-ZH11	1409.7737.02
Current probes		
20 kHz, AC/DC, 10 A/1000 A	R&S®RT-ZC02	1333.0850.02
100 kHz, AC/DC, 30 A	R&S®RT-ZC03	1333.0844.02
10 MHz, AC/DC, 150 A	R&S®RT-ZC10	1409.7750.02
100 MHz, AC/DC, 30 A	R&S®RT-ZC20	1409.7766.02
120 MHz, AC/DC, 5 A	R&S®RT-ZC30	1409.7772.02
Power supply for current probes	R&S®RT-ZA13	1409.7789.02
Active differential probes		
100 MHz, 1000:1/100:1, 8 MΩ, 1000 V (RMS), 3.5 pF	R&S®RT-ZD01	1422.0703.02
200 MHz, 10:1, 1 MΩ, 20 V diff., 3.5 pF	R&S®RT-ZD02	1333.0821.02
<b>Logic probes</b>		
Active 8 channel logic probe	R&S®RT-ZL03	1333.0715.02
<b>Probe accessories</b>		
Feedthrough termination 50 Ω	R&S®HZ22	3594.4015.02
Adapter BNC/banana	R&S®RT-ZA11	1333.0796.02
Probe pouch	R&S®RT-ZA19	1335.7875.02
<b>Choose your accessories</b>		
Soft case, for R&S®RTC1002 oscilloscope and accessories	R&S®RTC-Z3	1333.0867.02
Rackmount kit	R&S®ZZA-RTC1K	1333.0967.02

<b>Warranty</b>		
Base unit and passive probes that are included as standard accessories		3 years
All other items <sup>3</sup>		1 year
Service options		
Extended warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended warranty, two years	R&S®WE2	
Extended warranty with calibration coverage, one year	R&S®CW1	
Extended warranty with calibration coverage, two years	R&S®CW2	
Extended warranty with accredited calibration coverage, one year	R&S®AW1	
Extended warranty with accredited calibration coverage, two years	R&S®AW2	

#### **Extended warranty with a term of one and two years (WE1 and WE2)**

Repairs carried out during the contract term are free of charge <sup>4</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

#### **Extended warranty with calibration coverage (CW1 and CW2)**

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>4</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

#### **Extended warranty with accredited calibration (AW1 and AW2)**

Enhance your extended warranty by adding accredited calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated under accreditation, inspected and maintained during the term of the contract. It includes all repairs <sup>4</sup> and accredited calibration at the recommended intervals as well as any accredited calibration carried out during repairs or option upgrades.

<sup>3</sup> For options installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1 year warranty.

<sup>4</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.





Service that adds value

Worldwide  
Local and personalized  
Customized and flexible  
Uncompromising quality  
Long-term dependability

**Rohde & Schwarz**

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 85 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

**Sustainable product design**

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership



**Rohde & Schwarz training**

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

**Rohde & Schwarz customer support**

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)

