

ROHDE & SCHWARZ

Make ideas real

R&S®NGU401

versus Keithley 2460



What sets this source measure unit apart?

- ▶ Minimum residual ripple and noise to supply interference free voltage to sensitive DUTs
- ▶ Fast regulation of output voltage with minimum overshoot and very fast load recovery time
- ▶ Acquisition rate of up to 500 ksamples/s to capture extremely fast variations in voltage or current
- ▶ Voltage priority and current priority mode
- ▶ High-capacitance mode
- ▶ Modulation input


Your benefit	Features
Minimal overshoot from abrupt load changes	<ul style="list-style-type: none"> ▶ Optimized load recovery time of < 30 μs ▶ Handles abrupt load changes from a few nA to the ampere range without creating voltage drops or overshoots
Capture fast variations in voltage/current	<ul style="list-style-type: none"> ▶ Acquisition rate of up to 500 ksamples/s ▶ Voltage and current results available every 2 μs
Supply positive and negative voltages and currents	<ul style="list-style-type: none"> ▶ Four-quadrant operation allows the R&S®NGU401 to act as a source or sink in both polarities ▶ This enables tasks such as measuring the forward and reverse characteristics of semiconductor devices in a single test operation without having to make changes to the circuit
Can act as an AC source	<ul style="list-style-type: none"> ▶ The R&S®NGU401 source measure unit provides a modulation input to connect an arbitrary generator, for instance. The output follows the modulation input signal, enabling the instrument to act as an AC source and be used to simulate glitches and unstable conditions

Parameter	R&S®NGU401	Keithley 2460
Max. voltage/current/power	± 20 V / 8 A / 60 W	± 100 V / 7 A / 100 W
Voltage ripple and noise (RMS)	< 500 μ V (meas.)	noise: < 4.5 mV; ripple not specified
Current ripple and noise (RMS)	< 1 mA (meas.)	not specified
Load recovery time	< 30 μ s (meas.)	not specified
Rise time/fall time	< 100 μ s / < 100 μ s	not specified
Measurement functions	voltage, current, power, energy	voltage, current, resistance
Measured voltage/current ranges	2 / 6	6 / 10
Max. readback resolution	1 μ V / 100 pA	100 nV / 1 pA
Max. voltage readback accuracy	< 0.02 % + 500 μ V	< 0.012 % + 200 μ V
Max. current readback accuracy	< 0.025 % + 15 nA	< 0.025 % + 700 pA
Max. acquisition rate (min. step)	500 ksamples/s (2 μ s)	3000 readings/s
Arbitrary function (min. step)	QuickArb (100 μ s)	test sequencer
Protection functions	OVP, OCP, OPP, OTP	OVP, OTP
Digital I/O	optional	yes
High-capacitance mode (max. C)	yes (470 μ F)	no
Current priority mode	yes	no
Modulation input	yes	no




For prices and more information, visit
www.rohde-schwarz.com/product/NGU

Power envelope of the R&S®NGU401 versus Keithley 2460

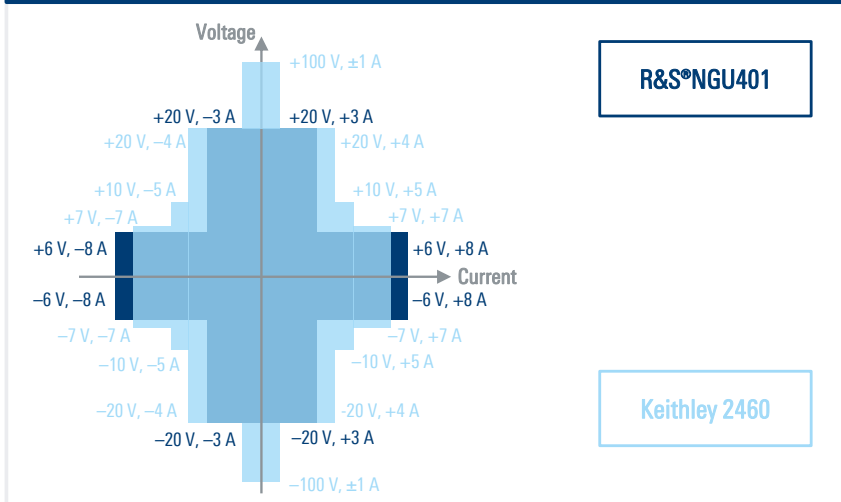

Optimized load recovery time

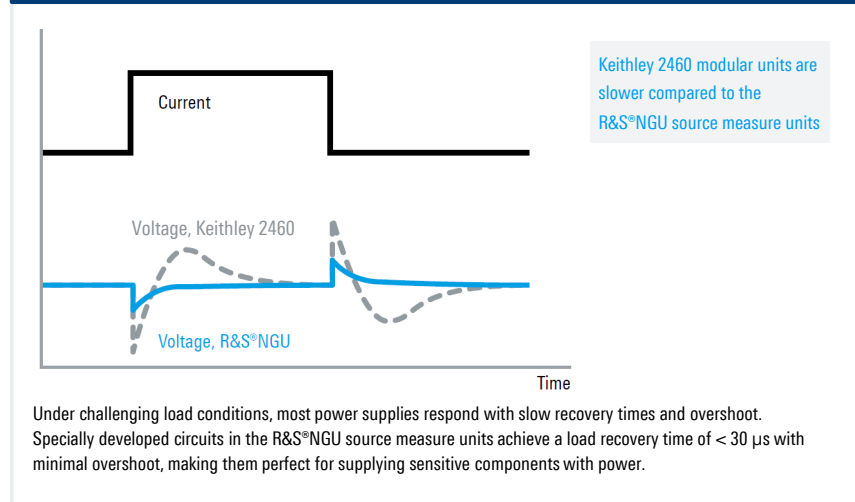

Under challenging load conditions, most power supplies respond with slow recovery times and overshoot. Specially developed circuits in the R&S®NGU source measure units achieve a load recovery time of < 30 μ s with minimal overshoot, making them perfect for supplying sensitive components with power.

Modulation input

Keithley 2460 modular units do not provide a modulation input

The R&S®NGU401 source measure unit provides a modulation input to connect an arbitrary generator, for instance. The output follows the modulation input signal, enabling the instrument to act as an AC source and be used to simulate glitches and unstable conditions.

Advantage factors of the R&S®NGU401 versus Keithley 2460

QuickArb
2048 points per cycle

Modulation input

EasyRamp
10 ms to 10 s

Remote sensing

Lower noise

> 150 x faster acquisition time